

04-03-00

A

Please type a plus sign (+) inside this box → ☐Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. _____

First Inventor or Application Identifier **GRAHAM M. ROUSE, JR.**Title **ADVANCED APERTURE FRAMEWORK BALLOON DISPLAY**

Express Mail Label No. _____

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages **45**]
(preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets **10**]
4. Oath or Declaration [Total Pages _____]
a. ☒ Newly executed (original or copy)
b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☐ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other: _____

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

Name **GRAHAM M. ROUSE, JR.**

Address **430 QUEEN STREET**

City **COLUMBIA** State **SC** Zip Code **29205**

Country **USA** Telephone **803 256 9743** Fax **803 779 6760**

Name (Print/Type) **GRAHAM M. ROUSE, JR.** Registration No. (Attorney/Agent) _____

Signature **[Signature]** Date **MARCH 31, 2006**

Burden Hour Statement: This form is estimated to take 0.7 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

04/01/00

jc688 U.S. PTO

04/01/00

09/542674

04/01/00

Please type a plus sign (+) inside this box → ☐

PTO/SB/21 (6-98)
Approved for use through 09/30/2000. OMB 0651-0031
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

TRANSMITTAL FORM (to be used for all correspondence after initial filing)	Application Number		
	Filing Date	MARCH 31, 2000	
	First Named Inventor	GRAHAM M. ROUSE, JR.	
	Group Art Unit		
	Examiner Name		
Total Number of Pages in This Submission		Attorney Docket Number	

ENCLOSURES (check all that apply)		
<input checked="" type="checkbox"/> Fee Transmittal Form	<input type="checkbox"/> Assignment Papers (for an Application)	<input type="checkbox"/> After Allowance Communication to Group
<input checked="" type="checkbox"/> Fee Attached	<input checked="" type="checkbox"/> Drawing(s)	<input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences
<input type="checkbox"/> Amendment / Response	<input type="checkbox"/> Licensing-related Papers	<input type="checkbox"/> Appeal Communication to Group (Appeal Notice, Brief, Reply Brief)
<input type="checkbox"/> After Final	<input type="checkbox"/> Petition Routing Slip (PTO/SB/69) and Accompanying Petition	<input type="checkbox"/> Proprietary Information
<input type="checkbox"/> Affidavits/declaration(s)	<input type="checkbox"/> Petition to Convert to a Provisional Application	<input type="checkbox"/> Status Letter
<input type="checkbox"/> Extension of Time Request	<input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address	<input checked="" type="checkbox"/> Additional Enclosure(s) (please identify below):
<input type="checkbox"/> Express Abandonment Request	<input type="checkbox"/> Terminal Disclaimer	PATENT APPLICATION
<input type="checkbox"/> Information Disclosure Statement	<input type="checkbox"/> Small Entity Statement	PATENT APPLICATION
<input type="checkbox"/> Certified Copy of Priority Document(s)	<input type="checkbox"/> Request for Refund	TRANSMITTAL FORM
<input type="checkbox"/> Response to Missing Parts/Incomplete Application		SMALL ENTITY STATUS
<input type="checkbox"/> Response to Missing Parts under 37 CFR 1.52 or 1.53		DECLARATION FOR
	Remarks	UTILITY DESIGN PATENT

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT	
Firm or Individual name	GRAHAM M. ROUSE, JR.
Signature	<i>GR</i>
Date	MARCH 31, 2000

CERTIFICATE OF MAILING			
I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231 on this date: MARCH 31, 2000			
Typed or printed name	GRAHAM M. ROUSE, JR.		
Signature	<i>GR</i>	Date	MARCH 31, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

**STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(b))--INDEPENDENT INVENTOR**

Docket Number (Optional)

Applicant, Patentee, or Identifier: GRAHAM M. ROUSE, JR

Application or Patent No.: _____

Filed or Issued: MARCH 31, 2000

Title: ADVANCED APERTURE FRAMEWORK BALLOON DISPLAY

As a below named inventor, I hereby state that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

I have not assigned, granted, conveyed, or licensed, and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ No such person, concern, or organization exists.
☐ Each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern, or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

GRAHAM M. ROUSE, JR

NAME OF INVENTOR

NAME OF INVENTOR

NAME OF INVENTOR

R. Rouse
Signature of inventor

Signature of inventor

Signature of inventor

MARCH 31, 2000
Date

Date

Date

BRIEF BACKGROUND OF THE INVENTION

A. GENERAL

There are a large variety of balloon display systems currently utilized for making balloon displays. The use of mechanical connections and of adhesives and multi part connectors to anchor balloons to structures, frameworks and to each other is not unusual. We call this approach "Anchor Frameworks". The use of frameworks which hold balloons within openings in the plane of the frameworks has also become commonplace. We call this approach "Aperture Frameworks".

B. ANCHOR FRAMEWORKS

Anchoring balloons to some structure or framework is probably among the oldest of display systems.

1. Description

a. Balloons are frequently connected by their stems directly to flexible lines or to more rigid wires, rods, columns, sheets, grids etc.. Most such display systems show off the tops of balloons and many reveal the anchored stems as part of the displays.

b. The use of adhesives to connect balloons to structures, frameworks and to each other is also not unusual. A single balloon is normally stuck to an adjacent object at only one or two points or small areas at once. Balloons may be stuck to the same object, or framework, or may be stuck to each other in a series or in a three dimensional array to create an adhesive connected balloon display.

c. Multi Part anchors are also normal. For instance, paper clips are sometimes connected to the lips of balloons and then to a structure. Occasionally, adhesive is used to connect hook & loop fasteners such as Velcro® to balloons. The matching hook (or loop) section of Velcro® is stuck to the structure and then the hook and loop sections are joined. It is also not unusual for monofilament (fishing) line to be tied to the neck of balloons and then tied to some additional structure.

2. Benefits

a. Most anchors are secure and hold balloons in place even after balloons begin to shrink.

b. Anchor methods allow for the use of a very wide range of structures and supplies which are generally available from local vendors.

c. Anchor framework balloon displays usually allow a wide range of choice as to the level of inflation and thus the color quality of balloons being used.

C. APERTURE FRAMEWORKS

Frameworks which hold balloons within apertures in the same plane as the framework have been around since at least 1983.

1. Description

- a. These aperture frameworks have consistently used only pneumatic pressure of the balloon expanding outward against the sides of the aperture as the mechanism to hold balloons in place.
- b. These aperture frameworks have consisted of a single layer of balloons held within the single, flat plane of the framework and apertures.
- c. These aperture frameworks have been designed with the plane of the apertures the same as the plane of the overall framework
- d. These aperture frameworks have been designed for the balloon display to be viewed from angles centered on a line perpendicular to the plane of the framework which is also a line perpendicular to the plane of the apertures.
- e. These aperture frameworks are frequently designed to be connected together by a separate mechanism into larger display units

2. Benefits

- a. Aperture frameworks commonly use only one layer of balloons to create graphics. This can produce considerable savings in balloons and in space required for the display.
- b. Aperture frameworks balloon displays often allow for the display to be viewed from both front and back with a single layer of balloons.
- c. Aperture framework balloon displays frequently display balloons with a "side" view, hiding the stem and the dark spot which otherwise often shows on the opposite end of the balloon.

BRIEF SUMMARY OF THE INVENTION

ADVANCED APERTURE FRAMEWORKS

This invention creates Advanced Aperture Frameworks with significant practical and esthetic benefits over previous systems.

1. Description

- a. This invention teaches the use of standard anchor framework techniques to hold balloons within the plane of aperture frameworks.
- b. This invention teaches the use of multiple layer aperture frameworks.
- c. This invention teaches the use of aperture frameworks in which the plane of apertures is not the same as the plane of the overall framework.
- d. This invention teaches the use of aperture frameworks which are intended to be viewed from angles not generally centered on a line perpendicular to the plane of the overall framework.
- e. This invention teaches the use of aperture frameworks which are intended to be viewed from angles not generally centered on a line perpendicular to the plane of the apertures.
- f. This invention teaches the use of apertures which are framed in more than one plane, including non-parallel planes.
- g. This invention teaches the use of aperture frameworks which extend in more than one plane, including non-parallel planes.

- h. This invention teaches the use of apertures which are framed in non-planar (essentially not flat) ways.
- i. This invention teaches the use of aperture frameworks which are non-planar (essentially not flat).
- j. This invention teaches the use of aperture "gates" in the frame of the aperture.
- k. This invention teaches the use of the balloons in the display as mechanisms to connect aperture frameworks together into larger units.
- L. This invention teaches the use of adjustable aperture frameworks that allow the framework to be readily disassembled and reassembled in new configurations.
- M. This invention teaches the use of combinations of these advanced aperture characteristics.

2. Benefits

- a. Advanced aperture framework balloon displays often take advantage of the basic benefits of aperture frameworks
 - Efficiency of balloon use
 - Efficiency of space
 - Double sided viewing
 - Side view of balloons
- b. Advanced aperture framework balloon displays often also take advantage of the basic benefits of anchor frameworks
 - Secure, long hold on balloons
 - Incorporation of local supplies
 - More choice in inflation sizing
- c. Advanced aperture framework balloon displays also take advantage of combinations of new characteristics
 - Added strength and display control with multilayers, multiplanar and non planar forms
 - More diversity of presentation options with variations in relative angles of apertures, framework and viewers
 - Easy loading and anchoring of balloons with the innovation of aperture gates.
 - Adjustable sizing of framework apertures with interlocking strips

BACKGROUND OF THE INVENTION

I. ANCHORED FRAMEWORK DISPLAYS

A. INTRODUCTION

Anchored Framework Balloon Displays incorporate any of at least three different approaches to anchoring balloons to some structural framework.

1. Probably most common is attaching the neck or stem of the balloon directly to a framework.
2. A second approach is to use adhesive/s between the balloon and the structure.

3. A third approach is to use multi part connectors. "Multi-part" means something more than a direct connection or in addition to an adhesive between the balloon and framework.

B. STEM ANCHORS

Most often anchor techniques attach balloons by their stems to structures, frameworks or to each other. These stem anchor techniques may be classified into at least five types by the way the stem is connected to the structure and at least three general classes by the way the balloon is positioned.

1. Types of Stem Anchor Connections

a. Balloon Wrap

It is probably most common to wrap or tie the stem of the balloon around some part of the structure or framework

b. Structure Wrap

It is not unusual to wrap or tie some part of the structure around the stem of the balloon. This regularly occurs when monofilament or ribbon is tied around the neck of a balloon. In one variation, the stem of the balloon is passed through a hole in the structure which is too small for the lips of the balloon to pass back through under the normal stresses of the display.

c. Pinch

In some cases the stem of the balloon will be forced into a slit or other narrow opening in a structure which is so tight as to hold the stem in place under normal stresses of the display.

d. Penetrate

Occasionally, part of the structure will actually penetrate the stem of the balloon (in a section of the stem which is outside the inflated portion of the balloon) to hold the stem in place.

e. Combinations

Many variations and combinations of these types of anchor connections are in general use.

2. Classes of Balloon Positioning

a. Class # A Loose Balloon Positioning

In the first class are connections which anchor the balloons loosely to the structure or framework. This first class can be seen in such classic balloon display forms as "string of pearl" arches or garlands. In these balloon displays, balloon stems are usually tied or clipped to a thin line such as monofilament or narrow string. The balloons, when helium filled, float up into an arch with balloons spaced along the line so that the balloons rarely or barely touch a neighboring balloon. In the garland version, balloons are similarly tied but filled with nitrogen or normal breathing air. The balloons

then hang in a curve from the line with the balloons rarely or barely touching a neighboring balloon. Even when tied tightly to the line, the flexibility of the line and of the elastic connection leave the balloons to swing freely in the air currents. The same looseness of connection may be seen when balloons are connected to more rigid wires, rods, nets, grids etc.. The balloons may still flop about in even gentle air currents. These kinds of connections are made with nylon film balloons as well as with latex balloons.

b. Class # B Tight Balloon Positioning

In the second class of connections, balloons are anchored tightly and directly to some structure or framework so as to fix the position of the balloon in relation to the structure or frame. This can be seen clearly in the old clown feet, in the original use of Rouse Designer Panels and in any of the variety of balloon cups. In each case the balloon is set against the structure and then the balloon stem is stretched to pull and hold the balloon tightly against the structure. The stem is then anchored to the structure so as to maintain the elastic pull of the balloon against the structure. Similar connections are normal with nylon film balloons as well. In the nylon film balloons the material is not so elastic as latex. The pressure of the balloon against the structure is maintained more by the "spongy" resilience of (1) the inflated balloon, (2) the twisted stem of the balloon and (3) the structure itself (corrugated board or thin plastic).

c. Class # C Multiple Contact Positioning

In the third class of connections, balloons are anchored to a structure or frame but their relative position is fixed with the assistance of additional contacts. Within this class there are significant variations in the level of distortion of balloons from the pneumatic pressure of the balloons against adjoining balloons and/or associated framing structures.

1 Minimum Balloon Distortion

Balloon displays in this subclass with minimal balloon distortion are seen on a daily basis in balloon clusters. Stems of inflated balloons are connected to other balloon stems and anchored to some structure or framework. The position of a balloon in such a cluster is determined by a combination of forces applied from different directions. There is the pull between each balloon and the anchor point. There is also the pneumatic pressure of the balloons one against the other. When such clusters of four to eight balloons are displayed independently of other such clusters, there is seldom a noticeable distortion of the balloons.

Another example of this minimal balloon distortion is in the standard loading of Rouse Designer Panels™ in flat sheets and then bending the sheets to create subtle inside curves.. Anchor points are spaced at 2" intervals in even rows and columns. Balloons are inflated in diameters of even numbered inches (2", 4", 6", etc.) and anchored to designated points at appropriate distances (2", 4", 6" etc.) apart. the balloons would just barely touch. When the panels are then bent into curved surfaces with the balloons on the inside of the curve the balloons are distorted slightly. The curved structure created is stronger than

when flat and the increased contact between balloons covers more of the open space between balloons.

This minimal balloon distortion can also occur with outside curves in the Designer Panels™. This is illustrated in the attached instructions for making a balloon cake (*It's A Piece of Cake*). The recommended triangular grid placement and 4 3/8" sizing of the balloons yields a distortion of about 3 1/3%.

2. Obvious Balloon Distortion

Balloon displays in this subclass with more obvious distortion occur when the clusters are forced together into packed columns, arches and garlands. In this form of balloon display, clusters of four to six balloons are forced from their natural, three dimensional arrays into a relatively flat form with balloons radiating from the center like spokes on a wheel, all in the same plane. The balloons are noticeably distorted where they contact adjacent balloons in the cluster. Balloons in such a pattern would spring back to there natural, three dimensional arrays except that another such cluster is stacked on top; then another, and another. These stacks of flat clusters are held together by some structure running through the centers of the clusters. The pressure of balloons in one cluster against the balloons in an adjacent cluster also produces perceptible distortion of the balloons.

This pattern of forcing anchored clusters together is further expanded in "precision wall" construction. Precision balloon walls are made by tying tightly together packed columns of anchored clusters of balloons.

This, more obvious distortion occurs when the inside curves with the Rouse Designer Panels™ is more acute rather than subtle.

It also occurs when the triangular pattern of the cake sides is used with the Designer Panels™ flat rather than curved. This produces balloon distortion of over 8 1/2%.

3. Considerable Balloon Distortion

Balloon displays in this subclass with considerable distortion occur in "balloon topiary" constructions. In balloon topiary sculptures a net, grid, or closely woven framework is constructed like a perforated shell to create a desired three-dimensional form. Openings in this shell are smaller than the natural diameter of the inflated balloons that are anchored to the framework. Balloons are often connected individually to the framework but are frequently connected as clusters of two or more. Some balloons may find their way to the inside of the shell, but the general intent is to keep the balloons on the outside of the framework. Balloons are usually attached to the framework in such quantities as to significantly distort the balloons from pressures of balloons against balloons and balloons against the framework. The idea is to anchor a sufficient number of squeezed balloons to the shell so as to fill all the cracks between balloons and create the illusion of a solid, textured surface on the framework. This produces balloon distortion in excess of 20%.

C. ADHESIVE ANCHORS

Current adhesive techniques fall into at least three general categories; chemical, thermal and backed.

1. Category # 1 Chemical Adhesives

In the first category are chemical adhesives directly between the balloon and the framework. This includes use of things like rubber cement, stick (rub on) glue, spray adhesive and adhesive transfer tape. In these cases the sticky chemical is the only thing between the balloon and the framework.

This category also includes adhesives that may not activate until contact between two appropriately coated surfaces. Adhesives of this type would have the advantage of reducing inadvertent adhesion of framework or balloon to inappropriate surfaces.

Similarly, this category also includes adhesive which activate only with the application of a separate catalyst.

2. Category # 2 Thermal Adhesives

In the second category are thermal adhesives directly between the balloon and the framework. This includes use of things like hot glue, cold glue and pan glue. In these cases the "sticky" is the only thing between the balloon and the framework, but the bonding power of the adhesive comes as the adhesive cools.

3. Category # 3 Tapes

In the third category are tapes. This includes use of adhesives with backing material. Two sided tapes are often used. One-sided tape may be circled into a loop with the adhesive on the outside to grab both the balloon and the framework.

D. MULTI-PART ANCHORS

1. Description

Multi-Part anchors are also normal. "Multi-part" refers to additional parts connecting the balloon and the structure other than adhesive or the balloon itself. Here are just three of many possible examples:

2. Examples

a. Paper clips are sometimes connected to the lips of balloons and then to a structure.

b. Hook & loop fasteners such as Velcro® are sometimes used to connect balloons to the structure.

c. monofilament (fishing) line is frequently tied to the neck of balloons and then tied to some additional structure.

II. APERTURE FRAMEWORK DISPLAYS

In addition to the anchored framework balloon displays discussed above, there are also aperture framework balloon displays.

A. DESCRIPTION

1. The Plane of the Balloons

Aperture framework balloon displays secure and position the balloons in the same plane as the framework. It is normal, however, for the sheet of balloons to be thicker than the framework that holds them.

Normal anchor balloon displays have the balloons generally on the surface of, or surrounding the framework.

2. Balloon Attachment

Currently, aperture frameworks do not count on stem anchors, adhesives, or multi-part anchors to hold the balloons within the framework. They use strictly the pneumatic pressure of the balloons squeezed into the apertures of the framework to secure and position the balloons.

3. Layers of the Display

Currently, aperture frameworks enclose a single, flat layer, sheet, or plane of balloons. The Skistimas Design System™ QuickFrame™ does use a double layer of wire grid, but this mechanism simply yields a wider band of framework to hold a single layer of balloons.

4. The Plane of the Apertures

Currently, the plane of apertures in Aperture Frameworks Balloon Displays is the same as the plane of the overall aperture framework

5. Viewing Angles

Currently, Aperture Framework Balloon Displays are designed to be viewed successfully from a relatively wide range of angles centered on a line generally perpendicular to the plane of the framework that is also perpendicular to the plane of the apertures.

B. BACKGROUND

The aperture approach may not be as old as the anchor techniques, but it has been in public use in the United States since at least 1983. Here are some examples:

1983

- E. K. Fernandez shows has been displaying balloons for their dart game at carnivals and fairs by squeezing the balloons into wooden grids since 1983.

1985

- Amy Stewart reports squeezing balloons into grids made out of taped together facial tissue boxes as far back as 1985.

1988

- Amy Stewart reports using wooden baby gates with balloons squeezed into them to create a display in her new store location starting in July of 1988.

- 1989

- 1990

- 1991

- 1992

- 1993

- 1994

- 1994**
- Pioneer Balloon Company introduced the double wire frame Skistimas Design System™ for displaying balloons squeezed into the 6" square grid openings in the spring of 1994.

1995

- Graham Rouse reports the first public use of his expandable Rouse Matrix Systems™ with balloons squeezed into the honeycomb plastic grid openings in the winter of 1995.

COMMERCIAL SYSTEMS

I have identified only 4 aperture framework systems custom manufactured for balloon decorators in the USA.

- Graham Rouse's "Designer Panels" from 1988,
- Marvin Hardy's "MagiGrid" from 1993,
- James Skistimas's SDS™ from 1994, and
- Graham Rouse's RMS™ from 1995

While all are still in use, only the last two are currently being marketed for decorators generally.

All recommend that balloons be under inflated from their normal size to give the balloons the resilience necessary for the physical distortions (13.33% to 57%) involved in squeezing the balloons into place.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a standard aperture framework.

FIG. 2 illustrates an advanced aperture framework with the planes of apertures perpendicular to the plane of the overall framework and apertures stacked in vertical lines.

FIG. 3 illustrates an advanced aperture framework with the planes of apertures perpendicular to the plane of the overall framework and apertures arranged in horizontal rows.

FIG. 4 illustrates an advanced aperture framework with apertures circumscribed in two planes each. One aperture plane is the same as standard aperture frameworks and one aperture plane is the same as in FIG. 2.

FIG. 5 shows a perspective view of a standard aperture framework both by itself and filled with balloons.

FIG. 6 shows a perspective view of a multilayered, advanced aperture framework balloon display in which the balloons from one layer are connected to the balloons of the second layer but the framework in one layer is not otherwise connected to the framework of the second layer. It also so shows a perspective view of the two frameworks without the balloons.

FIG. 7 shows a perspective view of an advanced aperture framework balloon display with two layers of balloons and the aperture framing of one layer of balloons directly connected to the aperture framing of the second layer of balloons. The figure also so shows a perspective view of the framework without the balloons.

FIG. 8 shows a perspective view of an advanced aperture framework balloon display with two layers of balloons. In this case the aperture framing is perpendicular to the plane of the overall framework and connects the two layers of balloons. The figure also shows a perspective view of the framework without the balloons.

FIG. 9 shows a perspective view of an advanced aperture framework balloon display with two layers of balloons and the aperture framing of one layer of balloons directly connected to the aperture framing of the second layer of balloons. In this case the number and arrangement

of balloon and associated circumscribing framework in one layer is different from that in the second layer. The figure also so shows a perspective view of the framework without the balloons.

FIG. 10 shows a perspective view of an advanced aperture framework balloon display in which the framework extends in two perpendicular planes. The figure also so shows a perspective view of the framework without the balloons.

FIG. 11 shows a perspective view of an advanced aperture framework in which the framework is not flat, but rather suggests a double curved surface. Apertures are not the same size or shape or in the same or parallel planes. Viewing is not generally oriented around a single line perpendicular to the plane of the overall framework or the plane of the apertures.

FIG. 12 shows a perspective view of two advanced aperture frameworks with apertures framed on all three axes. It shows some apertures framed with double curved surfaces.

FIG. 13 illustrates a closed anchor aperture. An anchor aperture is a small aperture in the framework circumscribing an inflatable chamber used to facilitate anchoring the inflatable chamber within the aperture.

FIG. 14 illustrates an anchor aperture with a simple self-closing gate.

FIG. 15 illustrates an open anchor aperture.

FIG. 16 illustrates the stem of a balloon being used to both anchor the balloon and connect two frameworks.

FIG. 17 illustrates the use of a self-locking spiral gate anchor aperture.

FIG. 18 illustrates the use of self-locking spirals as apertures for inflatable chambers rather than just anchors.

FIG. 19 illustrates the standard alignment of end tabs for connecting two Rouse Matrix Systems™ frameworks and shows how they are normally connected with a cable tie.

FIG. 20 shows a simple form of connecting end tabs by wrapping them around each other and interlocking especially configured notches.

FIG. 21 illustrates the same wrapping or "spiraling" technique as FIG 20. But with a more sophisticated notch pattern designed to more securely lock the tabs together.

FIG. 22 shows end tabs designed to use a "button hole" type joint to connect the two pieces.

FIG. 23 shows another, more sophisticated, version of a "button hole" joint in which the two tabs are identical.

FIG. 24 shows a "fish hook" type joint for connecting the end tabs.

FIG. 25 shows a "tongue hook" type joint supplemented with a cap lock tab to help secure the hold.

FIG. 26 shows one version of strapping material and how such straps may be wrapped to interlock for the construction of adjustable aperture frameworks.

FIG.27 shows another version of straps with wing tabs used to interlock for the construction of adjustable aperture frameworks.

DETAILED DESCRIPTIONS

I GENERAL DISCUSSION OF THE INVENTION

A. INTRODUCTION

This invention creates Advanced Aperture Frameworks with significant practical and esthetic benefits over previous systems.

1. ANCHOR TECHNIQUES

- This invention teaches the use of anchor framework methods and apparatus to hold balloons within the plane of aperture frameworks.

2. MULTI-LAYERS

- This invention teaches the use of multiple layer aperture frameworks.

3. APERTURE PLANE

- This invention teaches the use of aperture frameworks in which the plane of apertures is not the same as the plane of the overall framework.

4. VIEWING FRAMEWORKS

- This invention teaches the use of aperture frameworks that are intended to be viewed from angles not generally centered on a line perpendicular to the plane of the overall framework.

5. VIEWING APERTURES

- This invention teaches the use of aperture frameworks that are intended to be viewed from angles not generally centered on a line perpendicular to the plane of the apertures.

6. MULTI-PLANE APERTURE FRAMES

- This invention teaches the use of apertures that are framed in more than one plane, including non parallel planes.

7. MULTI-PLANE APERTURE FRAMEWORKS

- This invention teaches the use of aperture frameworks that extend in more than one plane, including non parallel planes.

8. NON FLAT APERTURE FRAMES

- This invention teaches the use of apertures that are framed in non-planar (essentially not flat) ways.

9. NON FLAT APERTURE FRAMEWORKS

- This invention teaches the use of aperture frameworks that are non-planar (essentially not flat).

10. APERTURE GATES

- This invention teaches the use of aperture "gates" in the frame of the aperture.

11. BALLOONS AS FRAMEWORK CONNECTORS

- This invention teaches the use of the balloons in the display as mechanisms to connect aperture frameworks together into larger units.

12.COMBINATIONS

- This invention teaches use of interlocking strips to produce aperture frameworks with hand adjustable apertures.

13.COMBINATIONS

- This invention teaches use of combinations of these advanced aperture framework apparatus and methods.

B. ANCHORED APERTURE FRAMEWORKS

1. STEM ANCHORS

a. One Anchor Per Balloon

- This invention teaches the use of Class B and/or Class C positioning anchors within aperture frameworks so as to secure and position the anchored balloon in the same plane as the framework. Only one such anchor is necessary, though more may often be used productively, in order to effectively keep the balloon essentially in the plane of the aperture framework if a Class B or Class C positioning anchor is used. This eliminates exclusive reliance upon pneumatic pressure to secure and position balloons in aperture frameworks as is the case under current usage in the trade. This makes available to aperture frameworks the efficiencies and esthetic advantages of anchor frameworks. This makes available to anchor methods the efficiencies and esthetic advantages of aperture frameworks.

b. Multiple Anchors Per Balloon

- This invention teaches the use of multiple anchors within aperture frameworks so as to secure and position the anchored balloon in the same plane as the framework. This eliminates exclusive reliance upon pneumatic pressure to secure and position balloons in aperture frameworks as is the case under current usage in the trade. This makes available to anchor methods the efficiencies and esthetic advantages of aperture frameworks.
- Currently most balloons are nominally "round" and have one stem for use in anchoring. Some of the "entertainer" family of balloons (#130, #260, #340, #350, #360, # 315, #318 and specialty balloons for Apples and Bee bodies) have two ends which can be left uninflated or under inflated and used effectively to anchor balloons to each other or to separate frameworks. More recently, a larger version of the "Bee Body"

balloons is being produced in Australia. Such multiple anchoring means class one anchors can be used and still retain the position of the balloon in the plane of the framework. Multiple Class B or multiple Class C positioning anchors add additional security for the positioning of the balloons.

- This invention anticipates the development of new shapes in both latex and "foil" balloons with two or more tabs, stems, protrusions, or the like, that will facilitate multiple anchoring. There already exist special techniques for adding anchor points to round balloons, but they are more difficult to make and use than would be the case if balloons were already manufactured with additional tabs, stems, or protrusions.

c. Anchor Configurations

- This invention teaches the use of all five types of Stem Anchor Connections to hold balloons in the plane of an aperture framework.

2. ADHESIVE ANCHORS

a. Spot Adhesive

- This invention teaches the use of spot adhesive within aperture frameworks so as to secure and position the anchored balloon in the same plane as the framework. Spot adhesives can have the effect of single or multiple stem anchors discussed earlier. Or, one or more adhesive spots within an aperture might serve to supplement a single or multiple stem anchors or area adhesive. Adhesive spots that are placed appropriately can reduce costs over more generally applied adhesives to hold balloons in place.

1. This invention teaches the use of Category #1, #2, and/or #3 adhesive as discussed in II.C. above.
2. This invention teaches application of spot adhesive at the time the framework is manufactured.
3. This invention teaches application of spot adhesive as a post manufacturing operation. Such a post manufacturing operation might be associated with the distribution of the product and/or with the end use of the product.
4. This invention teaches the use of single and/or multiple adhesive spots within an aperture.
5. This invention teaches the use of spot adhesive in conjunction with other anchor techniques as well.

b. Area Adhesive

- This invention teaches the use of area adhesive within aperture frameworks so as to secure and position the anchored balloon in the same plane as the framework. "Area" is intended to suggest the more general distribution of adhesive than would be indicated by "spot" without denoting overall surface coverage. Area adhesives can have the effect of single or multiple stem anchors discussed earlier. Or, one or more adhesive areas within an aperture might serve to supplement a single or multiple stem anchors or adhesive spots. Adhesive areas that are placed appropriately can reduce costs over more generally applied adhesives to hold balloons in place. At the same time, by increasing the area of adhesive coverage over spot applications, it would be

possible to use less aggressive adhesives that would allow for repositioning or replacing balloons with less risk of breaking the balloons.

1. This invention teaches the use of Category #1, #2, and/or #3 adhesive as discussed in II.C. above.
2. This invention teaches application of area adhesive at the time the framework is manufactured.
3. This invention teaches application of area adhesive as a post manufacturing operation. Such a post manufacturing operation might be associated with the distribution of the product and/or with the end use of the product.
4. This invention teaches the use of single and/or multiple adhesive areas within an aperture.
5. This invention teaches the use of area adhesive in conjunction with other anchor techniques as well.

c. General Adhesive

- This invention teaches the use of general adhesive coverage within aperture frameworks so as to secure and position the anchored balloon in the same plane as the framework. General adhesives can have the effect of multiple stem anchors discussed earlier. By increasing adhesive coverage over spot or area applications, it would be possible to use less aggressive adhesives that would allow for repositioning or replacing balloons with less risk of breaking the balloons.

1. This invention teaches the use of category #1, #2, and/or #3 adhesive as discussed in II.C. above.
2. This invention teaches the general application of adhesive at the time the framework is manufactured.
3. This invention teaches the general application of adhesive as a post manufacturing operation. Such a post manufacturing operation might be associated with the distribution of the product and/or with the end use of the product.
4. This invention teaches the use of general adhesive in conjunction with other anchor techniques as well.

d. Balloon Adhesive

- This invention teaches the use of adhesive initially applied to the balloon as well as adhesive initially applied to the framework.
1. This invention teaches the use of adhesive initially applied to both balloon and framework before balloon and framework are assembled into a display.
 2. This invention teaches the use of category #1, #2, and/or #3 adhesive as discussed in II.C. above.
 3. This invention teaches the use of adhesives which activate effectively only upon contact of two appropriately coated surfaces or upon the application of an independent catalyst.
 4. This invention teaches the general application of adhesive at the time the framework and/or balloon is manufactured.
 5. This invention teaches the application of adhesive as a post manufacturing operation. Such a post manufacturing operation might be associated with the distribution of the balloon/framework and/or with the end use of the balloon display.

e. Post Assembly Adhesive

- This invention teaches the use of adhesive after the balloon/s and framework are assembled into a display as well as before or during the display construction process.
 1. This invention teaches the insertion of adhesive, catalyst, or the like between the surfaces of the balloon and framework after the balloon is in place inside the framework as well as before or during the balloon placement process.
 2. This invention teaches the removal of some protective coating over the adhesive after the balloon is in place inside the framework as well as before or during the balloon placement process.
 3. This invention teaches the use of other post installation activation mechanisms. This would include but not be limited to the use of pressure sensitive adhesives that require some time period of contact before any significant bonding takes place.

3. MULTI-PART ANCHORS

- This invention teaches the use of other elements in addition to the balloon, the structure and adhesives to fix the position of balloons in the apertures of aperture frameworks.
- This invention teaches the use all the anchoring mechanisms previously discussed to connect the balloon to the additional element.
- This invention teaches the use all the anchoring mechanisms previously discussed to connect the structure to the additional element.

4. DESIGN FUNCTIONS & BENEFITS

a. Improve Pneumatic Dependent Systems

- This invention teaches the use of anchor methods and apparatus to improve the functionality of current and new configurations of aperture framework balloon displays over their functionality when dependent exclusively on pneumatic pressure to hold balloons in place. This includes, but is not limited to these examples:
 1. This invention teaches the use of anchor methods and apparatus to reduce the risk of balloons being prematurely forced out of the apertures in which they are held by increasing the holding power of the framework over pneumatic pressure alone..
 2. This invention teaches the use of anchor methods and apparatus to extend the time in which balloons will be held in their apertures even after balloon shrinkage has eliminated the holding power of pneumatic pressure.
 3. This invention teaches the use of anchor methods and apparatus to hold balloons to the aperture (rather than falling to the floor) even if the balloon is knocked off center and essentially out of the plane of the aperture.
 4. This invention teaches the use of Class A, Class B, and/or Class C anchors on the outer edge of the aperture framework will allow the extension of the balloon display beyond the limits of the framework itself and still remain in the same plane.
 5. This invention teaches the use of anchor methods and apparatus to reduce the inflated size of a balloon necessary to be held effectively in a given aperture size.
 - a- This allows the use of smaller and less expensive balloons.
 - b- This allows for greater under inflation of a given nominal size of balloon.

- ### **b. New Anchor Dependent Systems**

- ### 1. Larger Inflation & Aperture

- a- Wrap Around Effect

- With the use of anchor methods and apparatus, it is no longer necessary to depend on the wrap around effect to help hold balloons in place. The balloons may be inflated much closer to their nominal dimensions without loss of a secure hold on their place in the aperture. The wrap around effect will be minimized, but the anchors can do the job.

b- Reserve Air Effect

- If latex balloons were inflated only to the minimum size necessary to hold the balloons in place by pneumatic pressure when first installed, the balloons would shortly fall out.. Air is constantly escaping through the skin of the balloons. The more the balloon is "over inflated" in relation to the size of the aperture, the longer it takes for pneumatic pressure against the framework to be lost.

- With the use of anchor methods and apparatus, it is no longer necessary to depend so greatly on reserve air. The anchor can hold the balloons in place without pneumatic pressure.
- Aperture sizes may be larger in relation to the inflated size of the balloons that may be nearer their nominal sizes
- c- Economy of Scale
 - Use of Anchors in aperture frameworks could yield apertures up to 100% larger in area for the same nominal sizes of balloons. This would mean only half as many balloons would be required to create a balloon graphic of a given size. Or, a balloon graphic of a specified pattern of balloons could be made twice as large with a given number of balloons. Either way, you get twice as much for your investment in balloons.
- d- Esthetics of Scale
 - Balloons of any given nominal size are generally designed for use when inflated close to their nominal size. Their qualities of color and translucency are generally optimized at that nominal size.
 - Use of anchor methods and apparatus in aperture frameworks will facilitate optimization of these esthetic characteristics by allowing a wider range of balloon sizing options, including sizing balloons near their nominal sizes.

2. Reduced Framework

- This invention teaches the use of anchor methods and apparatus to allow reduction in the size, strength, and cost of materials used in construction the framework.

a- Wrap Around Effect

- The wrap around effect discussed in (2) (a) above depends not only on the relative over inflation of balloons in relation to the size of the apertures, but also on the thickness of the framework between balloons. If the material of the framework is very thin, there is very little for the balloon to wrap around. The balloons more easily come out.
- With the use of anchors to hold balloons in place in the plane of the framework, framing materials may be thinner.
- This can be an advantage in terms of reducing cost of material, reducing storage space, and reducing visibility of the framework while increasing the flexibility of the structure.

b- Stress Reduction

- The constant pneumatic pressure of balloons against an aperture framework places considerably more stress on the framework, as well as the balloons, than most anchor techniques.
- By using anchor techniques instead of pneumatic pressure (or, at least, to reduce the level of pneumatic pressure) weaker and normally less expensive materials become feasible for construction of the framework.

C. MULTI-LAYERED APERTURE FRAMEWORKS

1. THEY ARE NEW

a. Current Multi-Layer Graphics are not Aperture Frameworks

There are multi-layered balloon graphics systems, but they are not aperture frameworks. The most commonly used is a traditional anchored framework. It is called a "precision wall". In this system, balloons are wrapped around a column, usually in clusters of four balloons. A second cluster is wrapped around the column next to the first cluster. Then additional clusters are wrapped and nested against each other on the column until the column is covered. Additional columns are done in the same way. The columns are pressed together to make a solid wall. Often, fishing line is used to tie the columns together. This system effectively creates five staggered layers of balloons. The front three layers are generally visible from one side.

b. Current Aperture Frameworks Are Single Layer Graphics.

The Skistimas Design System™ QuickFrame™ does use a double layer of wire grid, but this mechanism simply yields a wider band of framework to hold a single layer of balloons.

c. Overlays Are Not Additional Layers of Aperture Frameworks.

Some of the promotional literature of SDS™, for instance, does show additional balloons on top of the aperture framework layer. These additional balloons are not, however, a second layer of aperture enclosed balloons. These additional balloons use the SDS™ framework as a traditional anchor framework. These additional balloons are most often tied to or through the framework and remain essentially outside the apertures.

2. GRAPHIC FUNCTIONS

- **Multi-Layered aperture frameworks** provide for alignment of balloons from one layer to the next. See Figures # 6, 7, 8, and 9 for multilayer examples.

1. **Apertures of one layer** can be aligned so that balloons which fill them can camouflage gaps between balloons in an adjacent layers

2. **Apertures of one layer** can be aligned so that balloons which fill them fall directly behind those of an adjacent layer. With this arrangement and appropriate lighting of transparent and translucent balloons, decorative blends of colors can be achieved and changed.

3. **Aperture sizes, shapes, and arrangements** may be varied between layers to create more complex designs.

3. STRUCTURAL FUNCTIONS

- **Multi-Layered aperture frameworks** provide for interlocking layers that can greatly increase the strength of the finished structure. See Figures # 6, 7, 8, and 9 for multilayer examples.

a. Rigid Frameworks

- When a single layer aperture framework balloon display is made with a rigid framework, the strength of the display sheet is mainly determined by the framework. Other things being equal, the strength of the display sheet goes up in direct proportion to the thickness of the plane created by the framework.

- If a second layer of rigid framework display is placed behind the first without being connected to the first, neither display is made stronger.
- If the two parallel frameworks are generally connected in a rigid manner, then, other things being equal, the strength of the sheet goes up in direct proportion to the thickness of the plane created by the joined frameworks.
- Other things being equal, the overall strength of the display would be increased proportionally with the rigid joining of additional layers of rigid frameworks.

b. Flexible Frameworks

- When a single layer aperture framework balloon display is made with a very flexible framework, the strength of the display sheet is determined by the balloons. Other things being equal, the strength of the sheet goes up in direct proportion to the thickness of the plane created by the contact area between adjacent balloons.
- If a second layer of flexible framework display is placed behind the first without being connected to the first, neither display is made stronger.
- If the two parallel displays are generally connected in a rigid manner, then, other things being equal, the strength of the sheet goes up in direct proportion to the thickness of the plane created by the joined displays.
- Other things being equal, the overall strength of the display would be increased proportionally with the rigid joining of additional layers of flexible frameworks displays.

4. PARTIAL LAYER COVERAGE

- **This invention teaches** the use of partial coverage of a given layer of aperture framework by second or additional layers of aperture framework. See Figure # 9 for one example.

a. Structural Functions

- Well planned partial layers can add significantly to the strength of the finished aperture framework balloon display without the necessity of full multiple layer coverage.

b. Graphic Functions

- Partial additional layers can be effective for creating relief effects in graphic designs as well as full sculptural effects.

5. APERTURE CHANGES

- **This invention teaches** the use of variations in aperture sizes, shapes and configurations within and between layers. See Figure # 11 for one example.

a. Structural Functions

- Well planned variations in aperture configurations can add significantly to the strength of the finished aperture framework balloon display without the necessity of full multiple layer coverage.

b. Graphic Functions

- Well planned variations in aperture configurations can facilitate and reinforce graphic designs.

D. APERTURE PLANE VARIATIONS

1. DIFFERENT FROM OVERALL

- This invention teaches the use of aperture frameworks in which the plane of apertures is not the same as the plane of the overall framework. (See Figures # 2, 3, 4, 8, 11, and 12 for a few examples.)

2. MULTIPLE PLANES

- This invention teaches the use of apertures that are framed in more than one plane, including non parallel planes. (See Figures # 4 and 12 for two examples.)

3. NON FLAT PLANES

- This invention teaches the use of apertures that are framed in non-planar (essentially not flat) ways. See Figure # 12 for one example.

E. VIEWING ANGLE VARIATIONS

1. NOT PERPENDICULAR TO APERTURES

- This invention teaches the use of aperture frameworks that are intended to be viewed from angles not generally centered on a line perpendicular to the plane of the apertures. (See Figures # 2, 3, 4, 8, 10, 11 & 12 for a few examples.)

2. NOT PERPENDICULAR TO FRAMEWORK

- This invention teaches the use of aperture frameworks that are intended to be viewed from angles not generally centered on a line perpendicular to the plane of the overall framework. See Figures # 10 and 11 for two examples.

F. APERTURE FRAMEWORK PLANE VARIATIONS

1. MULTIPLE PLANES

- This invention teaches the use of aperture frameworks that extend in more than one plane, including non parallel planes. See Figures # 10 and 11.

2. NON FLAT PLANES

- This invention teaches the use of aperture frameworks that are non-planar (essentially not flat). See Figure # 12.

G. GATES IN APERTURE FRAMES

- This invention teaches the use of aperture "gates" in the frame of the aperture.

1. GATES FOR ANCHORING

- This invention teaches the use of mini-apertures within the frames of balloon apertures to facilitate anchoring balloons.

- This "anchor aperture" would be used to secure a stem or multipart anchor by providing a small opening through which the stem of multipart might be attached or enclosed .
- **This invention teaches** the use of gates into those anchor apertures to facilitate their use.
- These gates might require some "lock" through anchor mechanisms already discussed. These gates might be "self-locking" as discussed in "3." below.

2. GATES FOR DISPLAYING

- GATES FOR DISPLAYING**
- This invention teaches the use of gates into balloon apertures to facilitate their use.
 - These gates might require some "lock" through anchor mechanisms already discussed. These gates might be "self-locking" as discussed in "3." below.

3. SELFLOCKING GATES

- SELFLOCKING GATES**
- This invention teaches the use of self-locking gates into balloon apertures and into anchor apertures to facilitate their use. See Figure # 14, 17, and 18 for examples in sheet framework material with some flexibility. Rigid framework material may profit from spring loaded latches to reclose the aperture after the balloon or the anchoring part is inserted through the gate.

H. BALLOONS AS FRAMEWORK CONNECTORS

- This invention teaches the use of the balloons in the display as mechanisms to connect aperture frameworks together into larger units.
- This invention teaches the use of the balloon stems wrapped or tied through anchor apertures in overlapping sections of aperture frameworks to connect adjacent aperture frameworks into larger units. See Figure # 16 for one example using an open anchor aperture. Closed anchor apertures as well as gate anchor apertures and other forms of anchor apertures might be utilized as well.
- This invention teaches the use of the balloons to connect adjacent aperture frameworks into larger units by having the balloon pass through two overlapping apertures from two adjacent aperture frameworks and thus serve like a hinge pin.
- This invention teaches the use of the balloons to connect adjacent aperture frameworks into larger units by having the balloon connect to balloon/s in an adjacent framework/s. See Figure # 6 for one example of balloons connected to balloons in an adjacent framework. In this case the arrangement creates a multilayered aperture framework.

I. ADJUSTABLE APERTURE FRAMEWORKS

- This invention teaches methods and apparatus for the construction and use of interlocking tabs.
- This invention teaches the use of interlocking tabs to connect and disconnect aperture frameworks without tools.
- This invention teaches methods and apparatus for the construction and use of interlocking straps.
- This invention teaches the use of interlocking straps to create aperture frameworks that may be unlocked and reassembled in new configurations without tools.
- This invention teaches methods and apparatus for the construction and use of interlocking strap & tab combinations.
- This invention teaches the use of interlocking strap & tab combinations to
 - a. add supplementary apertures to frameworks,
 - b. connect and disconnect aperture frameworks without tools,
 - b. create aperture frameworks that may be unlocked and reassembled in new configurations without tools..

J. COMBINATION APERTURE FRAMEWORKS

- This invention teaches the combining of methods and apparatus discussed above to maximize the positive benefits of aperture framework balloon displays.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a standard aperture framework.

FIG. 2 illustrates an advanced aperture framework with the planes of apertures perpendicular to the plane of the overall framework and apertures stacked in vertical lines.

FIG. 3 illustrates an advanced aperture framework with the planes of apertures perpendicular to the plane of the overall framework and apertures arranged in horizontal rows.

FIG. 4 illustrates an advanced aperture framework with apertures circumscribed in two planes each. One aperture plane is the same as standard aperture frameworks and one aperture plane is the same as in FIG. 2.

FIG. 5 shows a perspective view of a standard aperture framework both by itself and filled with balloons.

FIG. 6 shows a perspective view of a multilayered, advanced aperture framework balloon display in which the balloons from one layer are connected to the balloons of the second layer but the framework in one layer is not otherwise connected to the framework of the second layer. It also so shows a perspective view of the two frameworks without the balloons.

FIG. 7 shows a perspective view of an advanced aperture framework balloon display with two layers of balloons and the aperture framing of one layer of balloons directly connected to the aperture framing of the second layer of balloons. The figure also so shows a perspective view of the framework without the balloons.

FIG. 8 shows a perspective view of an advanced aperture framework balloon display with two layers of balloons. In this case the aperture framing is perpendicular to the plane of the

overall framework and connects the two layers of balloons. The figure also shows a perspective view of the framework without the balloons.

FIG. 9 shows a perspective view of an advanced aperture framework balloon display with two layers of balloons and the aperture framing of one layer of balloons directly connected to the aperture framing of the second layer of balloons. In this case the number and arrangement of balloon and associated circumscribing framework in one layer is different from that in the second layer. The figure also so shows a perspective view of the framework without the balloons.

FIG. 10 shows a perspective view of an advanced aperture framework balloon display in which the framework extends in two perpendicular planes. The figure also so shows a perspective view of the framework without the balloons.

FIG. 11 shows a perspective view of an advanced aperture framework in which the framework is not flat, but rather suggests a double curved surface. Apertures are not the same size or shape or in the same or parallel planes. Viewing is not generally oriented around a single line perpendicular to the plane of the overall framework or the plane of the apertures.

FIG. 12 shows a perspective view of two advanced aperture frameworks with apertures framed on all three axes. It shows some apertures framed with double curved surfaces.

FIG. 13 illustrates a closed anchor aperture. An anchor aperture is a small aperture in the framework circumscribing an inflatable chamber used to facilitate anchoring the inflatable chamber within the aperture.

FIG. 14 illustrates an anchor aperture with a simple self-closing gate.

FIG. 15 illustrates an open anchor aperture.

FIG. 16 illustrates the stem of a balloon being used to both anchor the balloon and connect two frameworks.

FIG. 17 illustrates the use of a self-locking spiral gate anchor aperture.

FIG. 18 illustrates the use of self-locking spirals as apertures for inflatable chambers rather than just anchors.

FIG. 19 illustrates the standard alignment of end tabs for connecting two Rouse Matrix Systems™ frameworks and shows how they are normally connected with a cable tie.

FIG. 20 shows a simple form of connecting end tabs by wrapping them around each other and interlocking especially configured notches.

FIG. 21 illustrates the same wrapping or "spiraling" technique as FIG 20. But with a more sophisticated notch pattern designed to more securely lock the tabs together.

FIG. 22 shows end tabs designed to use a "button hole" type joint to connect the two pieces.

FIG. 23 shows another, more sophisticated, version of a "button hole" joint in which the two tabs are identical.

FIG. 24 shows a "fish hook" type joint for connecting the end tabs.

FIG. 25 shows a "tongue hook" type joint supplemented with a cap lock tab to help secure the hold.

FIG. 26 shows one version of strapping material and how such straps may be wrapped to interlock for the construction of adjustable aperture frameworks.

FIG. 27 shows another version of straps with wing tabs used to interlock for the construction of adjustable aperture frameworks.

FIG. 28 shows one pattern of assembly of special straps for the construction of adjustable aperture frameworks.

II DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Referring now to FIG.1, this shows what would normally be considered a standard aperture framework when filled with inflatable chambers which are at least partially inflated within the white squares representing the apertures, and the inflatable chambers are surrounded by the framework represented by the black lines. This would be true if the inflatable chambers were held in the apertures exclusively by the pneumatic pressure of the inflatable chambers expanding outward against the circumscribing framework as is the common practice in the trade.

The invention here teaches the use of other mechanisms instead of and in addition to pneumatic pressure to hold the inflatable chambers in place in the apertures. When these mechanisms are used instead of or in addition to pneumatic pressure to hold the inflatable chambers in the apertures then this framework would be considered an advanced aperture framework and the display thus created would be considered an advanced aperture framework balloon display. These mechanism include:

- (1) at least one neck, stem, tab, or protrusion of an inflatable chamber is wrapped, tied, entangled, or otherwise secured directly to the framework;
- (2) at least one neck, stem, tab, or protrusion of an inflatable chamber is secured indirectly to the framework;
- (3) at least one area of adhesive is in contact with both the framework and the inflatable chamber;
- (4) at least one area of adhesive is in contact with both the inflatable chamber and a backing material for the adhesive,
 and at least one area of adhesive on the backing material is in contact with the framework;
- (5) at least one area of adhesive is in contact with both the inflatable chamber and a backing material for the adhesive,
 and the backing material is wrapped, tied, entangled, or otherwise secured directly to the framework;
- (6) at least one area of adhesive is in contact with both the inflatable chamber and a backing material for the adhesive,
 and the backing material is connected indirectly to the framework;
- (7) at least one set of material connects at least two inflatable chambers which are contained in different apertures,
 and this connecting material is restricted in it's position by passing through at least one small aperture in the framework between the larger apertures which contain the inflatable chambers;
- (8) at least one set of material connects at least two inflatable chambers which are contained in different apertures,
 and this connecting material is restricted in it's position by passing through at least one small aperture in the framework between the larger apertures which contain the inflatable chambers,

and the material surrounding said at least one small aperture has a break, gap, opening, gate, overlap or other access from the outside of said at least one small aperture to the inside of said at least one small aperture without threading one end of said connecting material directly through said at least one small aperture;

(9) at least one set of material connects at least two inflatable chambers which are contained in different apertures,

and this connecting material is restricted in it's position by passing through at least one small aperture in the framework between the larger apertures which contain the inflatable chambers,

and the material surrounding said at least one small aperture has a break, gap, opening, gate, overlap or other access from the outside of said at least one small aperture to the inside of said at least one small aperture without threading one end of said connecting material directly through said at least one small aperture,

and said break, gap, opening, gate, overlap or other access from the outside of said at least one small aperture automatically closes upon insertion of said connecting material sufficiently to maintain the restricted position of said connecting material under the stresses of normal use of the balloon display;

(10) said at least one inflatable chamber each is/are framed in multiple planes;

(11) at least one area of framework circumscribing said at least one inflatable chamber each is textured to increase friction with said at least one inflatable chamber each;

(12) at least one area of said at least one inflatable chamber each is textured to increase friction with said at least one framework;

(13) at least one area of framework circumscribing said at least one inflatable chamber each has ribs, bumps, protrusions, indentations, holes or other significant deviations from a generally even surface to increase the grip on said at least one inflatable chamber each;

(14) at least one area of said at least one inflatable chamber each has ribs, bumps, protrusions, indentations, holes or other significant deviations from a generally even surface to increase the grip on the framework circumscribing said at least one inflatable chamber each;

(15) said at least one framework has custom formed sections to match the form of said at least one inflatable chamber each;

(16) said at least one inflatable chamber each is/are custom formed to match the shape of the framework circumscribing said at least one inflatable chamber each;

(17) at least one area of framework circumscribing an inflatable chamber is made of elastic material which tightens the fit of the circumscribing framework upon the inflatable chamber;

(18) at least one area of the framework an inflatable chamber incorporates at least one spring or other flexible device which presses directly or indirectly against the inflatable chamber;

007070-1292450

(19) at least one area of framework circumscribing an inflatable chamber each is made of resilient, compressible material which tightens the fit of the framework against the inflatable chamber.

(20) at least one area between an inflatable chamber each and the framework circumscribing the inflatable chamber is occupied by material which increases the hold between the inflatable chamber and the surrounding framework, at least in part, by at least one mechanism selected from the following list:

- a. surface texture that increases friction;
- b. adhesive coating;
- c. a form that matches to the form of adjacent materials;
- d. volume that increases pressure on adjacent materials;
- e. resilient, compressible character of material;
- f. material of a nature to increase static electric cling.

The reference in this discussion to "inflatable chambers" is used as a more general and more broadly accurate term than "balloons" in relation to aperture framework balloon displays. There are currently on the market multi chambered balloons and this inventor has a patent pending for additional multi chambered balloons. It is anticipated that both current and proposed multi chambered balloons might be productively used in aperture frameworks. In such a case it might become quite common to have only one inflatable chamber of a multi chambered balloon in a single aperture of an aperture framework. Thus an aperture containing "at least one inflatable chamber" would be more generally applicable than an aperture containing "at least one balloon".

The small square in FIG. 1 which is beside the larger square (that is subdivided into sixteen small squares) is to illustrate what constitutes a single aperture in the grid of the larger square. It is for reference to compare to similar side illustrations of single apertures is FIG. 2, 3, and 4.

While this and other figures in this application illustrate advanced aperture frameworks as thin structures in relation to the size of apertures and inflatable chambers they contain, this need not be the case in reality. The frameworks may be quite large, quite small or in between in the size, in any of its three dimensions, compared to apertures and in comparison to inflatable chambers incorporated in the display. The size of spaces between apertures or between inflatable chambers may be quite large, quite small or in between. Frameworks may be rigid, flexible or in between. The shape of apertures may be quite regular or irregular, large or small. While metal, plastics, and wood are more popular choices for construction of aperture frameworks; paper, cloth or other materials could also be quite satisfactory for advanced aperture frameworks.

Referring now to FIG.2, this illustrates an advanced aperture framework with the planes of apertures perpendicular to the plane of the overall framework and with apertures stacked in vertical lines. The small trapezoid to the right of the larger square illustrates a perspective view of a single aperture from the advanced aperture framework. This invention teaches the use circumscribing frameworks for individual apertures which are in planes different from the overall framework of the display.

Referring now to FIG.3, this illustrates an advanced aperture framework with the planes of apertures perpendicular to the plane of the overall framework and with apertures arranged in horizontal lines. The small trapezoid to the right of the larger square illustrates a perspective view of a single aperture from the advanced aperture framework. This invention teaches the use circumscribing frameworks for individual apertures which are in planes different from the overall framework of the display.

Referring now to FIG.4, this illustrates an advanced aperture framework with the planes of apertures both perpendicular to and the same as the plane of the overall framework. The small trapezoids to the right of the larger square illustrates a perspective view of a single aperture from the advanced aperture framework. Note that the aperture is framed in two planes. This invention teaches the use circumscribing frameworks for individual apertures which are in multiple planes.

Referring now to FIG.5, this gives a perspective view of an aperture framework similar to the one illustrated in FIG 1. The framework is shown both without (FIG. 5-A) and with (FIG. 5-B) the apertures loaded with inflatable chambers.

Please note that while this and most other figures in this application illustrate inflatable chambers as roughly spherical objects, this need not be the case in reality. Inflatable chambers need have no particular size, shape, form, texture or material in order to qualify as appropriate for inclusion in an advanced aperture framework balloon display.

Referring now to FIG.6, this gives a perspective view of two parallel aperture frameworks similar to the one illustrated in FIG 1. and FIG. 5. The frameworks are shown both without (FIG. 6-A) and with (FIG. 6-B) the apertures loaded with inflatable chambers. When inflatable chambers from one framework are connected to inflatable chambers from the other framework they qualify as an advanced aperture framework balloon display under this invention.

Referring now to FIG.7, this gives a perspective view of a double layer advanced aperture framework. The framework is shown both without (FIG. 7-A) and with (FIG. 7-B) the apertures loaded with inflatable chambers. When inflatable chambers are arranged in multiple layers within one or more connected frameworks they qualify as advanced aperture framework balloon displays under this invention.

Referring now to FIG.8, this gives a perspective view of a double layer advanced aperture framework. In this case, the planes of the individual aperture frameworks are perpendicular to the horizontal plane of the overall framework. The framework is shown both without (FIG. 8-A) and with (FIG. 8-B) the apertures loaded with inflatable chambers. When inflatable chambers are arranged in multiple layers within one or more connected frameworks they qualify as an advanced aperture framework balloon display under this invention. When the aperture planes are different from the plane of the overall framework they qualify as an advanced aperture framework under this invention.

Referring now to FIG.9, this gives a perspective view of a double layer advanced aperture framework. The framework is shown both without (FIG. 9-A) and with (FIG. 9-B) the

apertures loaded with inflatable chambers. When inflatable chambers are arranged in multiple layers within one or more connected frameworks they qualify as advanced aperture framework balloon displays under this invention. In this case, the display has the added characteristic that one layer (the upper layer) has fewer inflatable chambers than the other (lower layer). This is not only acceptable to advanced aperture framework balloon displays, but is an advantage taught by this invention for both esthetic and structural purposes. When the larger layer is used as a background, the second (front) layer of the display can be used for raised text and graphics effects. On other occasions the double layer can be used to thicken and thus strengthen the single layer sheet of inflatable chambers.

Referring now to FIG.10, this gives a perspective view of an aperture framework which extends in two planes. The framework is shown both without (FIG. 10-A) and with (FIG. 10-B) the apertures loaded with inflatable chambers.

Referring now to FIG.11, this gives a perspective view of a double curved surface advanced aperture framework. The framework is shown without the apertures loaded with inflatable chambers. While it is somewhat unusual for current aperture frameworks to extend in more than one plane or to curve in one direction it is not unheard of. Aperture frameworks as articles of manufacture with double curved surfaces is an innovation of this invention.

Referring now to FIG.12, this gives a perspective view of advanced aperture frameworks with apertures framed in multiple planes with curved lines (FIG. 12-A) and with double curved surfaces (FIG. 12-B). . Frameworks for individual apertures which are multi planar and frameworks for individual apertures with double curved surfaces are innovations of this invention.

Referring now to FIG. 13, this illustrates a closed anchor aperture in both a perspective view (FIG. 13-A) and a cross section view (FIG. 13-B). An anchor aperture is a small aperture in the framework circumscribing an inflatable chamber used to facilitate anchoring the inflatable chamber within the aperture. The arrow shows the path that might be taken by the neck of a balloon through the anchor aperture and around the adjacent section of the framework and then back through the anchor aperture in order to secure the inflatable chamber to the framework.

In this example the neck of a single balloon is used. The lips of the balloon are of a size small enough to be forced through the anchor aperture but large enough not to pull back through under the normal stresses of an advanced aperture framework balloon display. This arrangement supports the position of the balloon within its aperture.

In other examples the neck of one balloon might be passed through the anchor aperture and tied closely and tightly to another inflatable chamber on the other side of the anchor aperture, thereby securing both to the framework in a way that would help both remain in their respective apertures.

It is anticipated that more inflatable chambers with multiple appendages (such as the "bee body" balloon and the Link-O-Loon™) will be developed and marketed. This will facilitate the use of multiple aperture anchors with inflatable chambers and further secure the position of inflatable chambers within advanced aperture frameworks.

Referring now to FIG. 14, this illustrates an anchor aperture with a simple gate (a slit from the anchor aperture proper to the edge of the framework) in both a perspective view (FIG. 14-A) and a cross section view (FIG. 14-B). Such a gate can facilitate inserting the neck of a balloon, or other material connected to a single inflatable chamber or connected to separate inflatable chambers on opposite sides of the anchor aperture. This can be especially useful when inflatable chambers are already connected to each other from the time of their manufacture or from the time of advance preparation for an event.

Referring now to FIG. 15, this illustrates an open anchor aperture in both a perspective view (FIG. 15-A) and a cross section view (FIG. 15-B). This notch is designed, like the original (FIG. 13) anchor aperture to be the right size to allow the insertion of the balloon neck and lips but substantially resist the lips of the balloon from pulling back through in normal use.

Referring now to FIG. 16, this illustrates an open anchor aperture in both a perspective view (FIG. 16-A) and a cross section view (FIG. 16-B). In this case, two different sections of aperture frameworks are overlapped with the open anchor aperture of each aligned with the other. This allows the neck of the balloon to wrap around both and connect the two sections of framework by hand without the use of special tools or accessories.

Referring now to FIG. 17, this perspective view illustrates an anchor aperture with a somewhat sophisticated gate. The slit from the aperture to the edge of the framework spirals to reach its ends. This configuration facilitates sliding material into the anchor aperture but resists its escape better than a simple slit gate or open anchor aperture.

Referring now to FIG. 18, this illustrates spiral gates used as apertures for inflated chambers. Three advanced aperture frameworks (18-a, 18-b, and 18-c) are shown with three spiral gate aperture each.

Each spiral gate aperture holds an inflatable chamber. In this case each inflatable chamber is a section of a #260 balloon which is continuous from framework 18-a to framework 18-b to framework 18-c. One balloon (18-d) has chambers which are pinched shut between the frameworks. One balloon (18-e) has chambers which are pinched shut at the frameworks. One balloon (18-f) remains essentially one chamber. All these variations are appropriate to advanced aperture framework balloon displays.

The use of single inflatable chambers as in 18-f, to connect different aperture frameworks is one of the innovations of this invention.

The use of continuously connected inflatable chambers as in all three balloons to connect different frameworks is another of the innovations of this invention.

Notice that the normal way for viewing such a display would be from the broad side of the balloons. This would be generally perpendicular to the plane of the three frameworks and generally perpendicular to the planes of the nine apertures. Such views are characteristic of some embodiments of advanced aperture framework balloon displays.

Notice that the plane of the balloons is generally perpendicular to the plane of the individual frameworks and generally perpendicular to the plane of the apertures. Such variation from the norm of current aperture framework balloon displays is characteristic of some embodiments of advanced aperture framework balloon displays.

Referring now to FIG. 19, this perspective view illustrates the standard alignment of end tabs for connecting two Rouse Matrix Systems™ frameworks (FIG. 19-A) and shows how they are normally connected with a cable tie (FIG. 19-B). FIG. 19-B gives an enlarged view of the section of FIG. 19-A enclosed in the outlined square. The cable tie is normally run through the corrugations near the end of the extended tab from one framework, and through the corrugations near the end of the extended tab from another framework, then through the self locking end of the cable tie. The cable tie is then pulled tightly to secure a close and relatively permanent connection between the tabs. This illustration is given to point out the savings in time and material by using the new interlocking mechanisms presented as part of this invention.

The new mechanisms do not require accessory parts nor as much time in the assembly of connections. They are also easily undone when desired.

Referring now to FIG. 20, shows a simple form of connecting end tabs by wrapping them around each other and interlocking especially configured notches.

"20-A" shows one embodiment of interlocking tabs disclosed in this application.

- The notch "c-20" crosses and rests in the notch "203". The area between "c-20" and "b-20" is hidden behind the area between "203" and "202".
- The notch "202" crosses and rests in the notch "b-20". The area between "202" and "201" is hidden behind the area between "b-20" and "a-20".
- The notch "a" crosses and rests in the notch "201".

"20-B" shows a finished view of the interlocking tabs from above.

"20-C" shows a finished view of the interlocking tabs from the edge as indicated by the arrow.

Referring now to FIG. 21, shows the same wrapping or "spiraling" technique as FIG. 20. But with a more sophisticated notch pattern designed to more securely lock the tabs together. "21-A" shows one embodiment of interlocking tabs disclosed in this application.

- The notch "c-21" crosses and rests in the notch "203". The area between "c-21" and "b-21" is hidden behind the area between "213" and "212".
- The notch "212" crosses and rests in the notch "b-21". The area between "212" and "211" is hidden behind the area between "b-21" and "a-21".
- The notch "a" crosses and rests in the notch "211".

"21-B" shows a finished view of the interlocking tabs from above.

"21-C" shows a finished view of the interlocking tabs from the edge as indicated by the arrow.

Referring now to FIG. 22, shows two end tabs for a "button" type connection. FIG. 22-A shows the tab with slot a-22 on the left and enlarged "button" protrusion 221 on the right. FIG. 22-B shows the assembly after 221 has been rotated and slipped through slot a-22 and then rotated back to a position

parallel to its starting position. This procedure provides a reversible lock of the two tabs. FIG. 22-C shows a view of 22-B as seen from the direction of the arrow.

Referring now to FIG. 23, this show a similar arrangement as in FIG. 22. In this case both end tabs have both a slot (a-23 and b-23) and a button protrusion (231 and 232). The insertion process is the same as in FIG. 21.

Referring now to FIG. 24, this show a similar process with a slot a-24. In this case the leading end of the "male" tab (241) is inserted through the slot a-24 until the entire "hook" 242 has passed through and then the tab is rotated back to a parallel position with the hook 242 left on the bottom side of the "female" tab. FIG. 24-B shows the assembled item. Fig 24-C shows a view aseen from the direction of the arrow.

Referring now to FIG. 25, this show a hook 251 inserted through hole a-25 and tab 252 used to hold the "male" end tab in position.

Referring now to FIG. 26, this shows two notched straps which are wrapped around each other to make a reversible lock of the two identical but rotated units..

Referring now to FIG. 27, this shows to straps with notches and tabs and illustrates them assembled.

007040" 12924560

CLAIMS

WHAT IS CLAIMED IS:

1. A balloon display comprised of:
 - A. at least one framework with at least two apertures; and
 - B. at least two apertures of said at least one framework contain at least one inflatable chamber each,
said at least one inflatable chamber each being at least partially inflated,
and
said at least one inflatable chamber each being circumscribed by a portion of the framework defining the aperture; and
 - C. at least two of said at least one inflatable chamber each are held in their respective apertures of said at least one framework, at least in part, by at least one mechanism selected from the following list:
 - (1) at least one neck, stem, tab, or protrusion of an inflatable chamber is wrapped, tied, entangled, or otherwise secured directly to the framework;
 - (2) at least one neck, stem, tab, or protrusion of an inflatable chamber is secured indirectly to the framework;
 - (3) at least one area of adhesive is in contact with both the framework and the inflatable chamber;
 - (4) at least one area of adhesive is in contact with both the inflatable chamber and a backing material for the adhesive,
and at least one area of adhesive on the backing material is in contact with the framework;
 - (5) at least one area of adhesive is in contact with both the inflatable chamber and a backing material for the adhesive,
and the backing material is wrapped, tied, entangled, or otherwise secured directly to the framework;
 - (6) at least one area of adhesive is in contact with both the inflatable chamber and a backing material for the adhesive,
and the backing material is connected indirectly to the framework;
 - (7) at least one set of material connects at least two inflatable chambers which are contained in different apertures,
and this connecting material is restricted in it's position by passing through at least one small aperture in the framework between the larger apertures which contain the inflatable chambers;
 - (8) at least one set of material connects at least two inflatable chambers which are contained in different apertures,
and this connecting material is restricted in it's position by passing through at least one small aperture in the framework between the larger apertures which contain the inflatable chambers,
and the material surrounding said at least one small aperture has a break, gap, opening, gate, overlap or other access from the outside of said at

007070-12924560

(9) at least one set of material connects at least two inflatable chambers which are contained in different apertures,

and the material surrounding said at least one small aperture has a break, gap, opening, gate, overlap or other access from the outside of said at least one small aperture to the inside of said at least one small aperture without threading one end of said connecting material directly through said at least one small aperture,

(10) said at least one inflatable chamber each is/are framed in multiple planes;

(12) at least one area of said at least one inflatable chamber each is textured to increase friction with said at least one framework;

(14) at least one area of said at least one inflatable chamber each has ribs, bumps, protrusions, indentations, holes or other significant deviations from a generally even surface to increase the grip on the framework circumscribing said at least one inflatable chamber each;

(16) said at least one inflatable chamber each is/are custom formed to match the shape of the framework circumscribing said at least one inflatable chamber each;

(18) at least one area of the framework circumscribing said at least one inflatable chamber each incorporates at least one spring or other flexible device which presses directly or indirectly against said at least one inflatable chamber each:

(19) at least one area of framework circumscribing said at least one inflatable chamber each is made of resilient, compressible material which

Variable	Mean	SD	Min	Max
Age	34.5	10.2	18	65
Gender	0.5	0.5	0	1
Marital status	0.7	0.5	0	1
Education	12.5	2.1	9	16
Income	15.2	8.5	5	35
Health status	0.8	0.4	0	1
Smoking status	0.3	0.5	0	1
Alcohol consumption	0.2	0.4	0	1
Exercise frequency	0.5	0.5	0	1
Stress level	4.2	1.5	1	7
Sleep quality	3.8	1.2	1	6
Work satisfaction	4.5	1.8	1	7
Life satisfaction	5.2	2.0	1	8
Depression score	2.1	1.5	0	5
Anxiety score	1.8	1.4	0	5
Resilience score	3.5	1.2	1	6
Optimism score	4.0	1.5	1	7
Self-efficacy score	3.2	1.3	1	6
Perceived stress	3.0	1.2	1	6
Work-life balance	3.5	1.5	1	7
Family support	4.2	1.8	1	7
Community support	3.8	1.6	1	7
Healthcare access	4.5	1.5	1	7
Health insurance	0.9	0.3	0	1
Healthcare utilization	0.6	0.5	0	1
Healthcare satisfaction	4.0	1.5	1	7
Healthcare accessibility	3.5	1.4	1	7
Healthcare quality	4.2	1.6	1	7
Healthcare affordability	3.8	1.5	1	7
Healthcare availability	4.0	1.4	1	7
Healthcare effectiveness	4.5	1.5	1	7
Healthcare safety	4.2	1.4	1	7
Healthcare timeliness	4.0	1.5	1	7
Healthcare patient-centeredness	4.5	1.6	1	7
Healthcare transparency	4.0	1.5	1	7
Healthcare accountability	4.2	1.4	1	7
Healthcare equity	4.0	1.5	1	7
Healthcare inclusiveness	4.2	1.4	1	7
Healthcare responsiveness	4.5	1.5	1	7
Healthcare innovation	4.0	1.4	1	7
Healthcare sustainability	4.2	1.5	1	7
Healthcare leadership	4.5	1.6	1	7
Healthcare governance	4.0	1.5	1	7
Healthcare performance	4.2	1.4	1	7
Healthcare impact	4.5	1.5	1	7
Healthcare reputation	4.0	1.4	1	7
Healthcare brand	4.2	1.5	1	7
Healthcare culture	4.5	1.6	1	7
Healthcare values	4.0	1.5	1	7
Healthcare mission	4.2	1.4	1	7
Healthcare vision	4.5	1.5	1	7
Healthcare strategy	4.0	1.4	1	7
Healthcare planning	4.2	1.5	1	7
Healthcare implementation	4.5	1.6	1	7
Healthcare evaluation	4.0	1.5	1	7
Healthcare improvement	4.2	1.4	1	7
Healthcare innovation	4.5	1.5	1	7
Healthcare sustainability	4.0	1.4	1	7
Healthcare leadership	4.2	1.5	1	7
Healthcare governance	4.5	1.6	1	7
Healthcare performance	4.0	1.5	1	7
Healthcare impact	4.2	1.4	1	7
Healthcare reputation	4.5	1.5	1	7
Healthcare brand	4.0	1.4	1	7
Healthcare culture	4.2	1.5	1	7
Healthcare values	4.5	1.6	1	7
Healthcare mission	4.0	1.5	1	7
Healthcare vision	4.2	1.4	1	7
Healthcare strategy	4.5	1.5	1	7
Healthcare planning	4.0	1.4	1	7
Healthcare implementation	4.2	1.5	1	7
Healthcare evaluation	4.5	1.6	1	7
Healthcare improvement	4.0	1.5	1	7

tightens the fit of the framework against said at least one inflatable chamber each.

(20) at least one area between said at least one inflatable chamber each and the framework circumscribing said at least one inflatable chamber each is occupied by material which increases the hold between said at least one inflatable chamber each and the surrounding framework, at least in part, by at least one mechanism selected from the following list:

- a. surface texture that increases friction;
- b. adhesive coating;
- c. a form that matches to the form of adjacent materials;
- d. volume that increases pressure on adjacent materials;
- e. resilient, compressible character of material;
- f. material of a nature to increase static electric cling.

2. The balloon display as recited in claim 1 further comprising:
pneumatic pressure of the at least partially inflated inflatable chamber against the surrounding framework as a mechanism helping to hold said at least one inflatable chamber each within their respective apertures.
3. The balloon display as recited in claim 1 wherein:
the plane of at least two of said at least two apertures containing said at least one inflatable chamber each are not the same as the plane of the overall framework/s .
4. The balloon display as recited in claim 1 wherein:
at least two of said at least two apertures containing said at least one inflatable chamber each are framed with materials which curve in more than one plane.
5. The balloon display as recited in claim 1 wherein:
said at least one framework with at least two apertures extends in more than one plane.
6. The balloon display as recited in claim 1 wherein:
said at least one framework with at least two apertures curves in more than one plane.
7. The balloon display as recited in claim 1 wherein:
the display is set to be viewed from angles not centered on a line perpendicular to the plane of the overall framework.
8. The balloon display as recited in claim 1 wherein:
the display is set to be viewed from angles not centered on a line perpendicular to the planes of the apertures.
9. The balloon display as recited in claim 1 wherein:
said at least one framework with at least two apertures is comprised of at least two layers with at least two apertures in each layer, and

at least two apertures in each of said at least two apertures in each layer, contain at least one inflatable chamber each,
said at least one inflatable chamber each being at least partially inflated, and
said at least one inflatable chamber each being circumscribed by a portion of the framework defining the aperture.

10. The balloon display as recited in claim 1 wherein:

A. said at least one framework with at least two apertures is at least two frameworks with at least two apertures each; and

B. at least two apertures in each of said at least two frameworks contain at least one inflatable chamber each,

said at least one inflatable chamber each being at least partially inflated, and

said at least one inflatable chamber each being circumscribed by a portion of the framework defining the aperture; and

C. at least one inflatable chamber in at least one of said at least two frameworks is connected to at least one inflatable chamber in another of said at least two frameworks.

11. The balloon display as recited in claim 1 wherein:

said framing material used to circumscribe said inflatable chambers is connected to other framing material used to circumscribe said inflatable chambers at least in part by hand without the necessity of tools or accessories by using at least one mechanism selected from the following list:

(1) sections of framing material having notches, wrap around other sections of framing material having notches in such a way as to interlock;

(2) sections of framing material having at least one bulbous piece each, connect with sections of framing material having at least one slit or slot each by the insertion of the bulbous piece through the slit or slot and then rotating said sections of framing material so that the bulbous piece will not, under the normal stresses of use, pull back through the slot;

(3) sections of framing material having at least one slit, slot or hole each, connect with sections of framing material having at least one angular protrusion by the insertion of the protrusion through the slit, slot or hole in such a direction that the normal stresses of use tend to reinforce the placement of the protrusion;

(4) sections of framing material having at least one slit, slot or hole each, connect with sections of framing material having at least one angular protrusion by the insertion of the protrusion through the slit, slot or hole and the presence of at least one tab, strip, bump or other physical obstruction to the removal of the protrusion from the hole;

(5) sections of framing material overlap other sections of framing material and the overlapped sections are held together, at least in part, by wrapping the neck, stem, or other protrusion from an inflatable chamber around said overlapped sections;

(6) sections of framing material overlap other sections of framing material and the overlapped sections are held together, at least in part, by wrapping the neck, stem, or other protrusion from an inflatable chamber around the overlapped sections at the point of matching notches, bumps, or other irregularities in the two overlapped sections;

(7) sections of framing material overlap other sections of framing and the overlapped sections are held together, at least in part, by putting the neck, stem, or other protrusion from an inflatable chamber through matching holes, slits or other apertures in the two overlapping sections;

(8) sections of framing material overlap other sections of framing material and the overlapped sections are held together, at least in part, by inserting inflatable chambers in matching apertures in the overlapped section of framing material.

12. A balloon display comprised of:

A. at least two layers of inflatable chambers with at least two inflatable chambers in each of said at least two layers; and

B. said at least two inflatable chambers are at least partially inflated; and

C. framing material circumscribes said at least two inflatable chambers in said at least two layers; and

D. framing material that circumscribes at least one inflatable chamber in a given layer of said at least two layers is connected to framing material that circumscribes at least one other inflatable chamber in the same given layer; and

E. said at least two layers of inflatable chambers are connected by at least one mechanism selected from the following list:

(1) framing material circumscribing inflatable chambers in one layer of said at least two layers is directly connected to framing material circumscribing inflatable chambers in at least one other layer of said at least two layers;

(2) framing material circumscribing inflatable chambers in one layer of said at least two layers is indirectly connected to framing material circumscribing inflatable chambers in at least one other layer of said at least two layers;

(3) inflatable chambers in one layer of said at least two layers are made of continuous material with inflatable chambers in at least one other layer of said at least two layers;

(4) inflatable chambers in one layer of said at least two layers are directly connected to inflatable chambers in at least one other layer of said at least two layers;

(5) inflatable chambers in one layer of said at least two layers are indirectly connected to inflatable chambers in at least one other layer of said at least two layers.

13. The balloon display as recited in claim 12 wherein:

said at least two inflatable chambers are held in their respective circumscribing framing materials, at least in part, by at least one mechanism selected from the following list:

(10) said at least one inflatable chamber each is/are framed in multiple planes;

(11) at least one area of framework circumscribing said at least one inflatable chamber each is textured to increase friction with said at least one inflatable chamber each;

(12) at least one area of said at least one inflatable chamber each is textured to increase friction with said at least one framework;

(13) at least one area of framework circumscribing said at least one inflatable chamber each has ribs, bumps, protrusions, indentations, holes or other significant deviations from a generally even surface to increase the grip on said at least one inflatable chamber each;

(14) at least one area of said at least one inflatable chamber each has ribs, bumps, protrusions, indentations, holes or other significant deviations from a generally even surface to increase the grip on the framework circumscribing said at least one inflatable chamber each;

(15) said at least one framework has custom formed sections to match the form of said at least one inflatable chamber each;

(16) said at least one inflatable chamber each is/are custom formed to match the shape of the framework circumscribing said at least one inflatable chamber each;

(17) at least one area of framework circumscribing said at least one inflatable chamber each is made of elastic material which tightens the fit of the circumscribing framework upon said at least one inflatable chamber each;

(18) at least one area of the framework circumscribing said at least one inflatable chamber each incorporates at least one spring or other flexible device which presses directly or indirectly against said at least one inflatable chamber each;

(19) at least one area of framework circumscribing said at least one inflatable chamber each is made of resilient, compressible material which tightens the fit of the framework against said at least one inflatable chamber each.

(20) at least one area between said at least one inflatable chamber each and the framework circumscribing said at least one inflatable chamber each is occupied by material which increases the hold between said at least on inflatable chamber each and the surrounding framework, at least in part, by at least one mechanism selected from the following list:

- a. surface texture that increases friction;
- b. adhesive coating;
- c. a form that matches to the form of adjacent materials;
- d. volume that increases pressure on adjacent materials;
- e. resilient, compressible character of material;
- f. material of a nature to increase static electric cling.

(21) pneumatic pressure of the at least partially inflated inflatable chamber against the circumscribing framing material.

14. A balloon display as recited in claim 12 wherein:

said framing material used to circumscribe said inflatable chambers is connected to other framing material used to circumscribe said inflatable chambers at least in part by hand without the necessity of tools or accessories by using at least one mechanism selected from the following list:

- (1) sections of framing material having notches, wrap around other sections of framing material having notches in such a way as to interlock;
- (2) sections of framing material having at least one bulbous piece each, connect with sections of framing material having at least one slit or slot each by the insertion of the bulbous piece through the slit or slot and then rotating said sections of framing material so that the bulbous piece will not, under the normal stresses of use, pull back through the slot;
- (3) sections of framing material having at least one slit, slot or hole each, connect with sections of framing material having at least one angular protrusion by the insertion of the protrusion through the slit, slot or hole in such a direction that the normal stresses of use tend to reinforce the placement of the protrusion;
- (4) sections of framing material having at least one slit, slot or hole each, connect with sections of framing material having at least one angular protrusion by the insertion of the protrusion through the slit, slot or hole and the presence of at least one tab, strip, bump or other physical obstruction to the removal of the protrusion from the hole;
- (5) sections of framing material overlap other sections of framing material and the overlapped sections are held together, at least in part, by wrapping the neck, stem, or other protrusion from an inflatable chamber around said overlapped sections;
- (6) sections of framing material overlap other sections of framing material and the overlapped sections are held together, at least in part, by wrapping the neck, stem, or other protrusion from an inflatable chamber around the overlapped sections at the point of matching notches, bumps, or other irregularities in the two overlapped sections;
- (7) sections of framing material overlap other sections of framing material and the overlapped sections are held together, at least in part, by putting the neck, stem, or other protrusion from an inflatable chamber through matching holes, slits or other apertures in the two overlapping sections;
- (8) sections of framing material overlap other sections of framing material and the overlapped sections are held together, at least in part, by inserting inflatable chambers in matching apertures in the overlapped section of framing material.

15. A balloon display comprised of:

- A. at least two frameworks with at least two apertures each; and
- B. at least two apertures of said at least two frameworks contain at least one inflatable chamber each; and
- C. said at least one inflatable chamber each is at least partially inflated; and

001010-12924550

D. said at least one inflatable chamber each is circumscribed by a portion of the framework defining the aperture containing said at least one inflatable chamber each; and

E. said at least two frameworks are connected by inflatable chambers which extend from within apertures in one of said at least two frameworks into the apertures of at least one other of said at least two frameworks.

16. A balloon display as recited in claim 15 wherein:

 said framing material used to circumscribe said inflatable chambers is connected to other framing material used to circumscribe said inflatable chambers at least in part by hand without the necessity of tools or accessories by using at least one mechanism selected from the following list:

 (1) sections of framing material having notches, wrap around other sections of framing material having notches in such a way as to interlock;

 (2) sections of framing material having at least one bulbous piece each, connect with sections of framing material having at least one slit or slot each by the insertion of the bulbous piece through the slit or slot and then rotating said sections of framing material so that the bulbous piece will not, under the normal stresses of use, pull back through the slot;

 (3) sections of framing material having at least one slit, slot or hole each, connect with sections of framing material having at least one angular protrusion by the insertion of the protrusion through the slit, slot or hole in such a direction that the normal stresses of use tend to reinforce the placement of the protrusion;

 (4) sections of framing material having at least one slit, slot or hole each, connect with sections of framing material having at least one angular protrusion by the insertion of the protrusion through the slit, slot or hole and the presence of at least one tab, strip, bump or other physical obstruction to the removal of the protrusion from the hole;

 (5) sections of framing material overlap other sections of framing material and the overlapped sections are held together, at least in part, by wrapping the neck, stem, or other protrusion from an inflatable chamber around said overlapped sections;

 (6) sections of framing material overlap other sections of framing material and the overlapped sections are held together, at least in part, by wrapping the neck, stem, or other protrusion from an inflatable chamber¹ around the overlapped sections at the point of matching notches, bumps, or other irregularities in the two overlapped sections;

 (7) sections of framing material overlap other sections of framing material and the overlapped sections are held together, at least in part, by putting the neck, stem, or other protrusion from an inflatable chamber through matching holes, slits or other apertures in the two overlapping sections;

 (8) sections of framing material overlap other sections of framing material and the overlapped sections are held together, at least in part, by

inserting inflatable chambers in matching apertures in the overlapped sections of framing material.

17. The balloon display as recited in claim 15 wherein:

said at least two inflatable chambers are held in their respective circumscribing framing materials, at least in part, by at least one mechanism selected from the following list:

(1) at least one neck, stem, tab, or protrusion of an inflatable chamber is wrapped, tied, entangled, or otherwise secured directly to the framework;

(2) at least one neck, stem, tab, or protrusion of an inflatable chamber is secured indirectly to the framework;

(3) at least one area of adhesive is in contact with both the framework and the inflatable chamber;

(4) at least one area of adhesive is in contact with both the inflatable chamber and a backing material for the adhesive,

and at least one area of adhesive on the backing material is in contact with the framework;

(5) at least one area of adhesive is in contact with both the inflatable chamber and a backing material for the adhesive,

and the backing material is wrapped, tied, entangled, or otherwise secured directly to the framework;

(6) at least one area of adhesive is in contact with both the inflatable chamber and a backing material for the adhesive,

and the backing material is connected indirectly to the framework;

(7) at least one set of material connects at least two inflatable chambers which are contained in different apertures,

and this connecting material is restricted in it's position by passing through at least one small aperture in the framework between the larger apertures which contain the inflatable chambers;

(8) at least one set of material connects at least two inflatable chambers which are contained in different apertures,

and this connecting material is restricted in it's position by passing through at least one small aperture in the framework between the larger apertures which contain the inflatable chambers,

and the material surrounding said at least one small aperture has a break, gap, opening, gate, overlap or other access from the outside of said at least one small aperture to the inside of said at least one small aperture without threading one end of said connecting material directly through said at least one small aperture;

(9) at least one set of material connects at least two inflatable chambers which are contained in different apertures,

and this connecting material is restricted in it's position by passing through at least one small aperture in the framework between the larger apertures which contain the inflatable chambers,

and the material surrounding said at least one small aperture has a break, gap, opening, gate, overlap or other access from the outside of said at

0070707-12924560

least one small aperture to the inside of said at least one small aperture without threading one end of said connecting material directly through said at least one small aperture,

And said break, gap, opening, gate, overlap or other access from the outside of said at least one small aperture automatically closes upon insertion of said connecting material sufficiently to maintain the restricted position of said connecting material under the stresses of normal use of the balloon display;

(10) said at least one inflatable chamber each is/are framed in multiple planes;

(11) at least one area of framework circumscribing said at least one inflatable chamber each is textured to increase friction with said at least one inflatable chamber each;

(12) at least one area of said at least one inflatable chamber each is textured to increase friction with said at least one framework;

(13) at least one area of framework circumscribing said at least one inflatable chamber each has ribs, bumps, protrusions, indentations, holes or other significant deviations from a generally even surface to increase the grip on said at least one inflatable chamber each;

(14) at least one area of said at least one inflatable chamber each has ribs, bumps, protrusions, indentations, holes or other significant deviations from a generally even surface to increase the grip on the framework circumscribing said at least one inflatable chamber each;

(15) said at least one framework has custom formed sections to match the form of said at least one inflatable chamber each;

(16) said at least one inflatable chamber each is/are custom formed to match the shape of the framework circumscribing said at least one inflatable chamber each;

(17) at least one area of framework circumscribing said at least one inflatable chamber each is made of elastic material which tightens the fit of the circumscribing framework upon said at least one inflatable chamber each;

(18) at least one area of the framework circumscribing said at least one inflatable chamber each incorporates at least one spring or other flexible device which presses directly or indirectly against said at least one inflatable chamber each;

(19) at least one area of framework circumscribing said at least one inflatable chamber each is made of resilient, compressible material which tightens the fit of the framework against said at least one inflatable chamber each.

(20) at least one area between said at least one inflatable chamber each and the framework circumscribing said at least one inflatable chamber each is occupied by material which increases the hold between said at least on inflatable chamber each and the surrounding framework, at least in part, by at least one mechanism selected from the following list:

- a. surface texture that increases friction;
- b. adhesive coating;
- c. a form that matches to the form of adjacent materials;

007070-12924560

- d. volume that increases pressure on adjacent materials;
 - e. resilient, compressible character of material;
 - f. material of a nature to increase static electric cling.
- (21) pneumatic pressure of the at least partially inflated inflatable chamber against the circumscribing framing material.

007070" 4.224550

ADVANCED APERTURE FRAMEWORK BALLOON DISPLAY

A balloon display comprised of at least one or at least two frameworks as specified in different embodiments. Each framework has apertures that circumscribe inflatable chambers. The inflatable chambers are arranged in at least one or at least two layers as specified in different embodiments. The inflatable chambers are secured in the apertures by any of a variety of means specified. Elements of the display may be arranged in a variety of relationships to one another as specified. Elements of the display are connected by any of a variety of means specified. The display is designed for viewing in any of a variety of directions specified in different embodiments.

This invention relates to decorative designs utilizing balloons held in the apertures of frameworks.

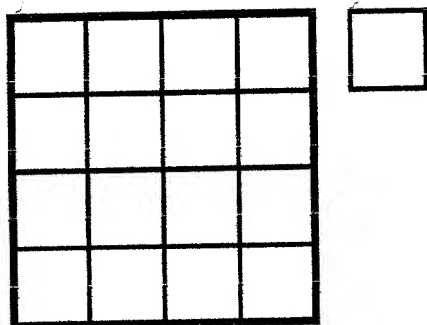


FIG. 1

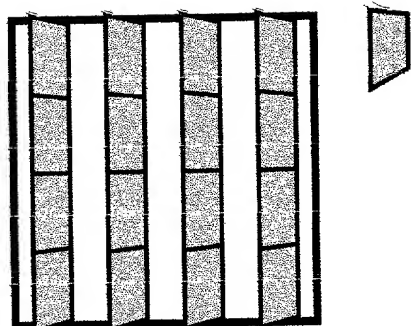


FIG. 2

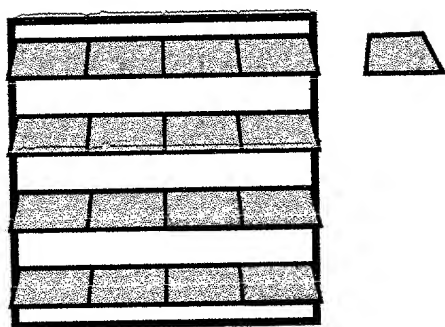


FIG. 3



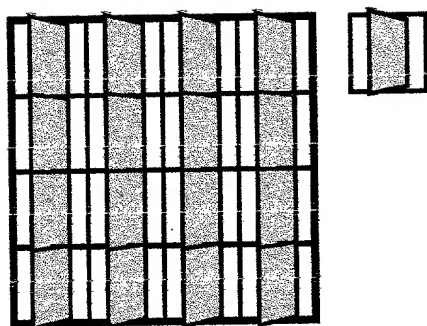


FIG. 4

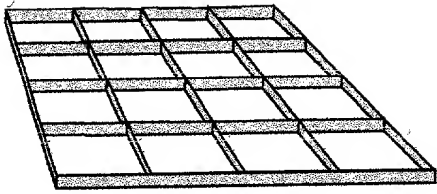


A

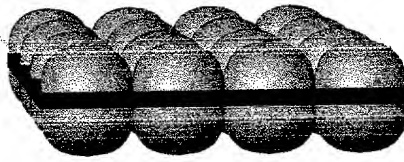


B

FIG. 5

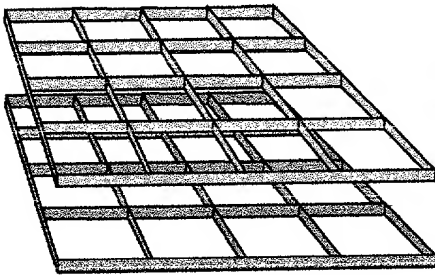


A

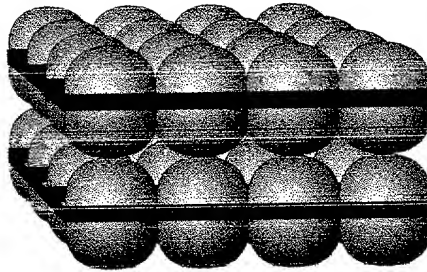


B

FIG. 6

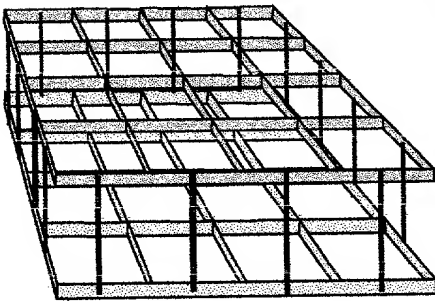


A

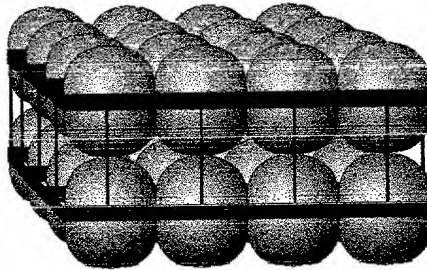


B

FIG. 7

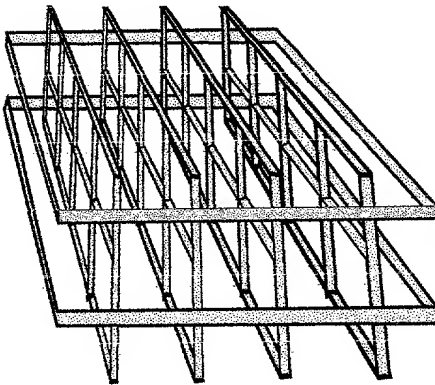


A

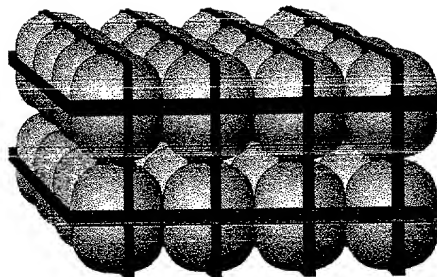


B

FIG. 8

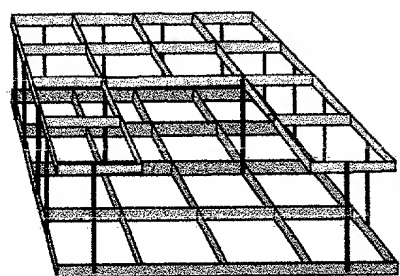


A

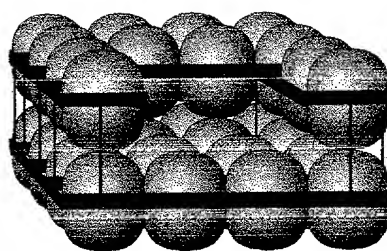


B

FIG. 9

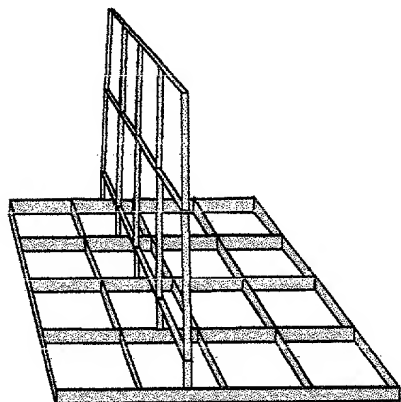

A

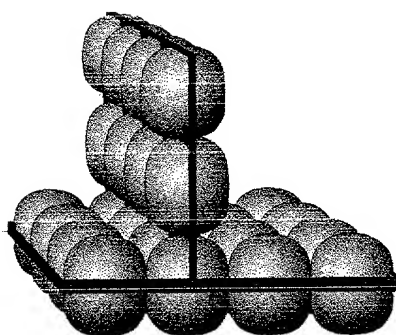

B

FIG. 10



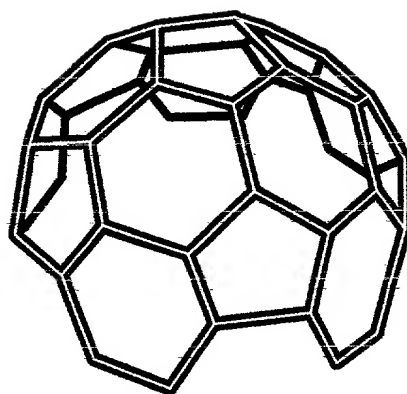


FIG. 11




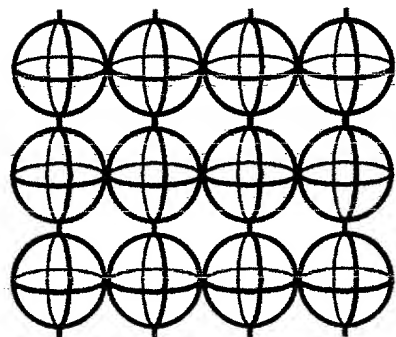


A

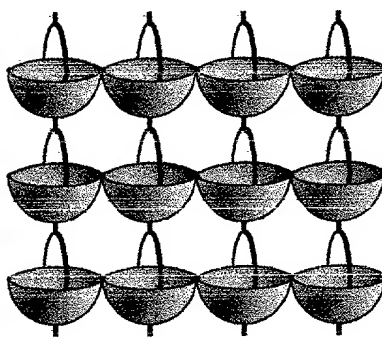

B

FIG. 12

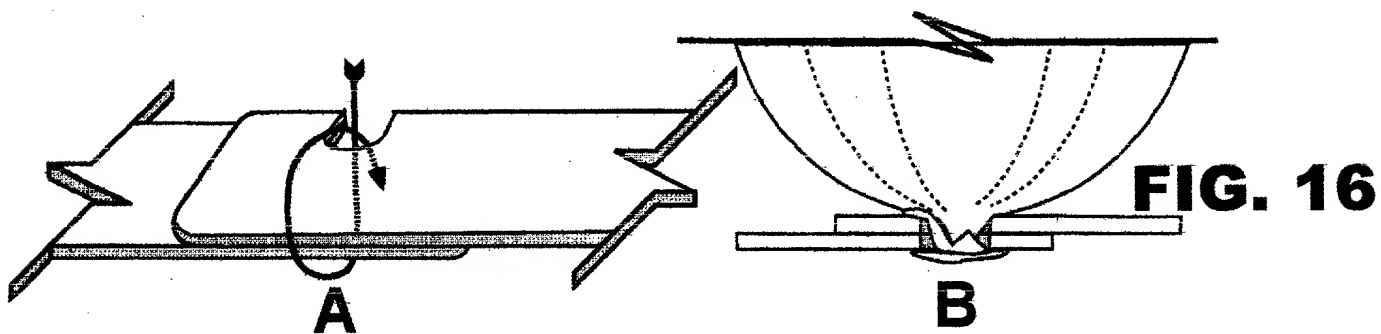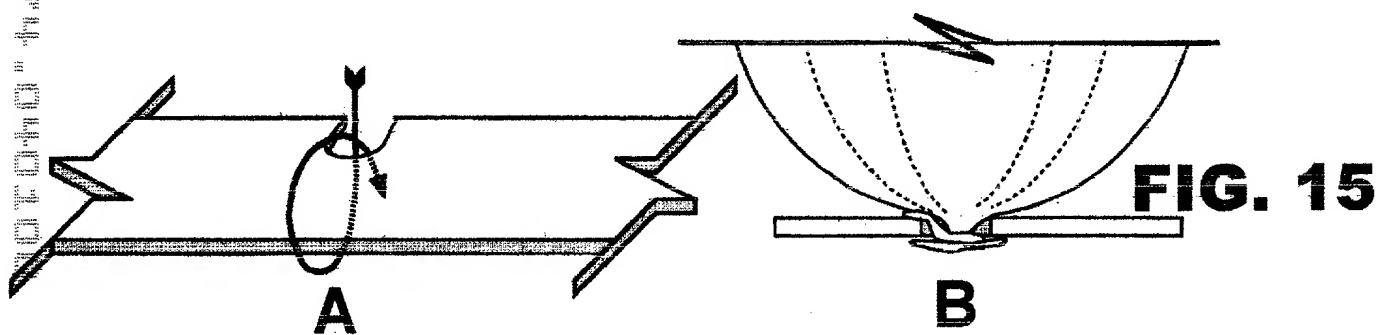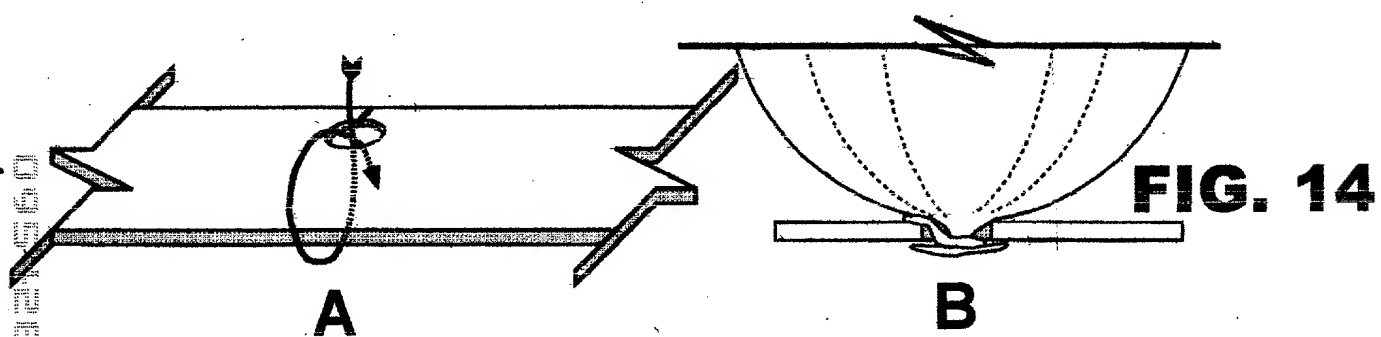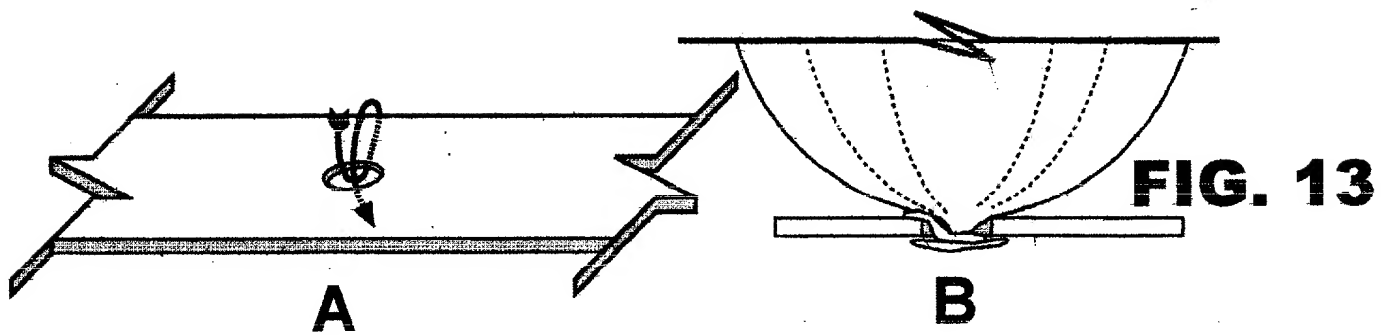

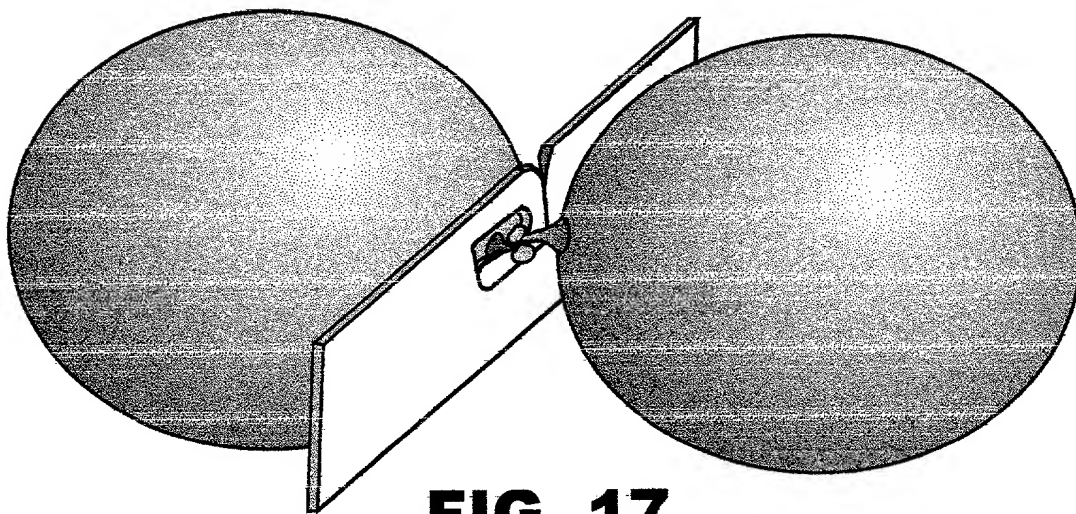


FIG. 17

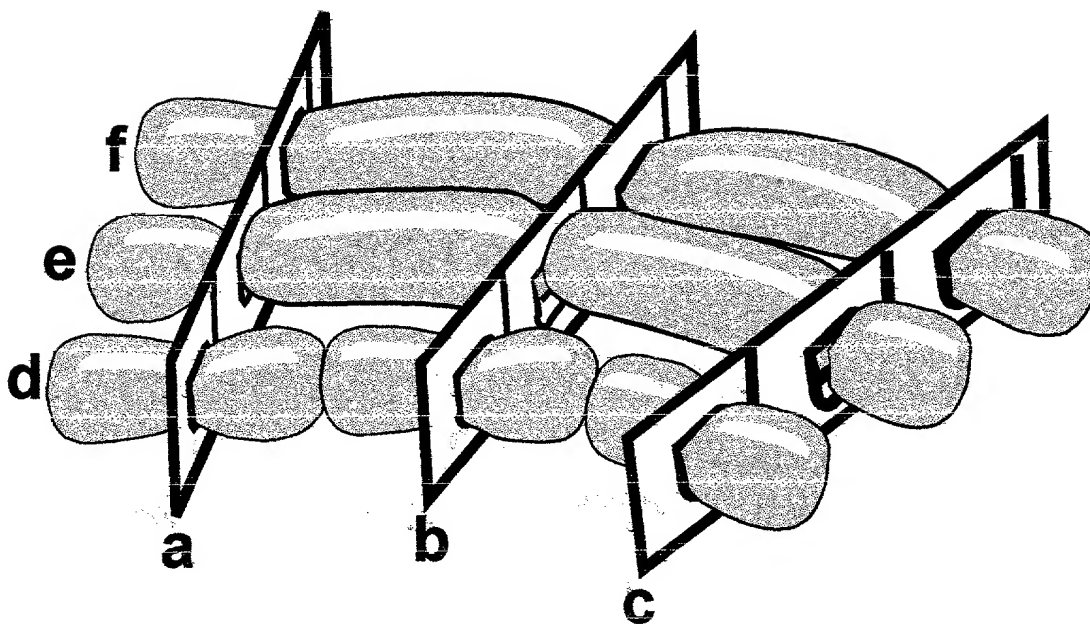
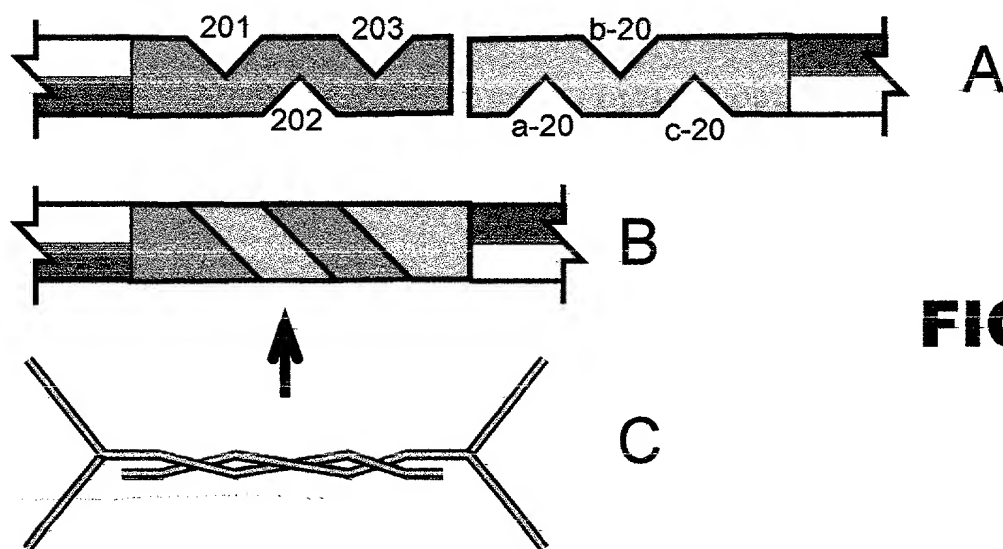
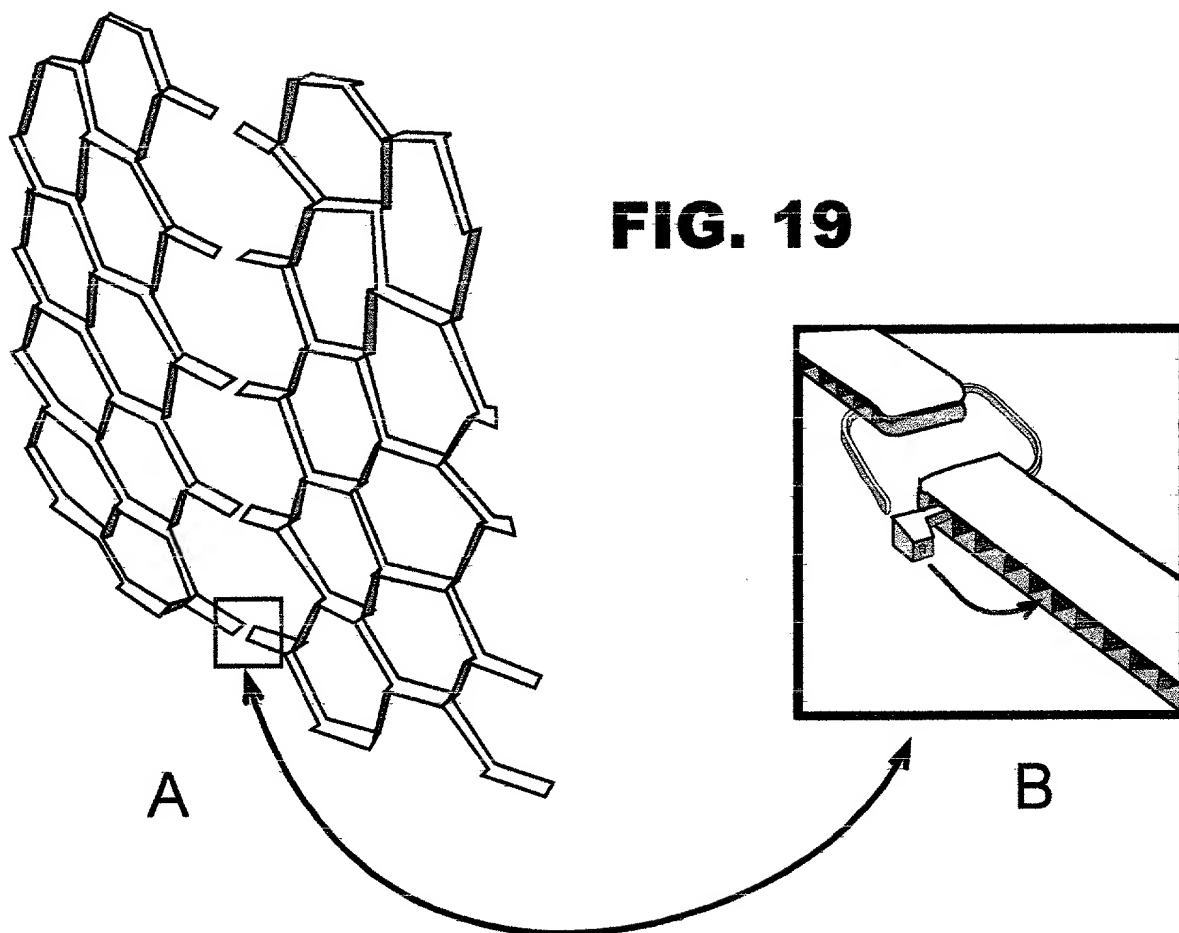


FIG. 18



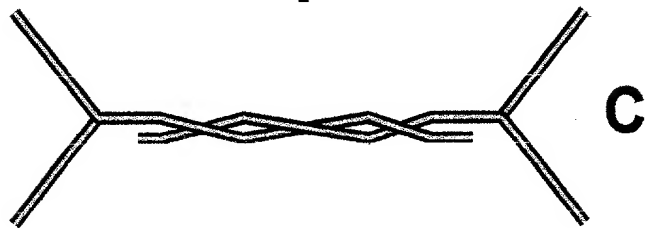
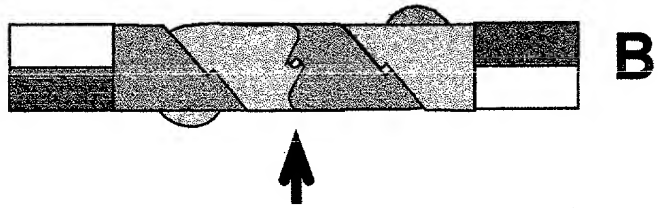
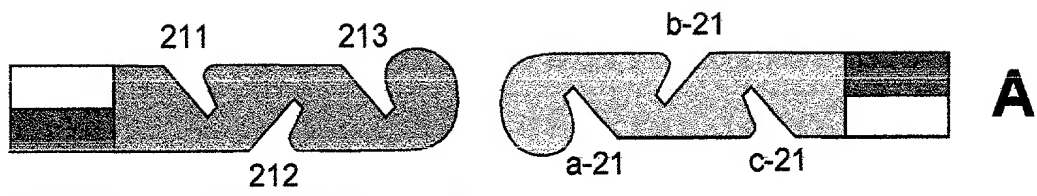


FIG. 21




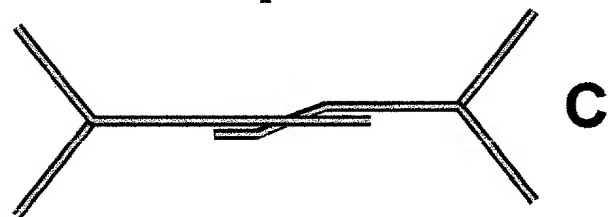



FIG. 22

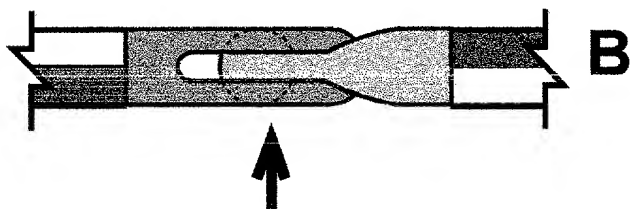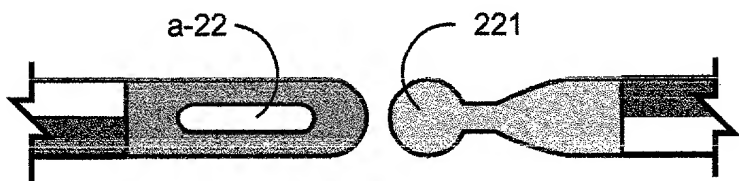

A

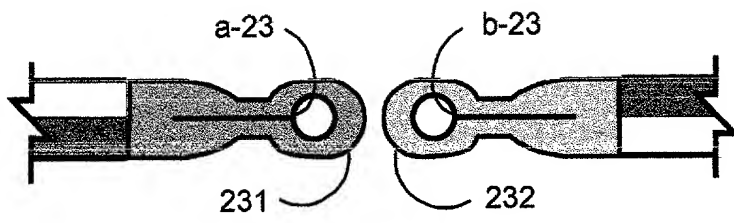


B

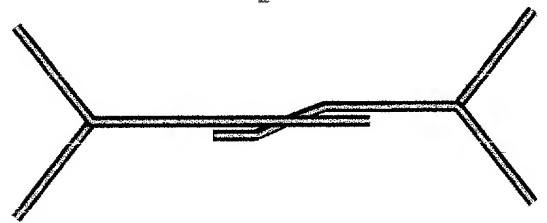

C


FIG. 23

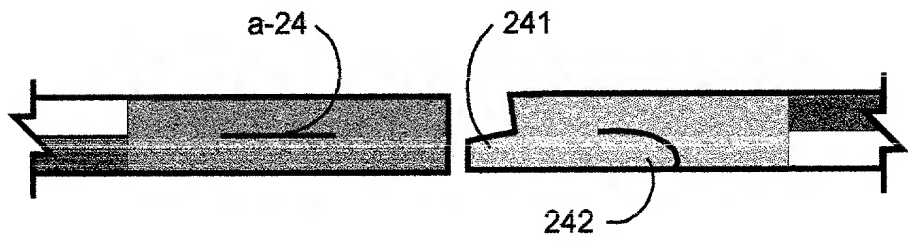

A



B

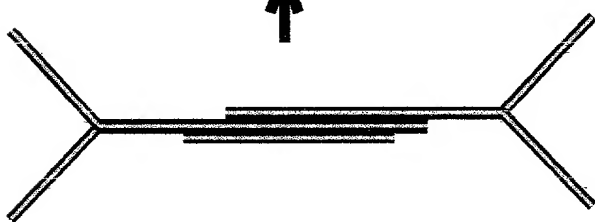

C

FIG. 24

007040-1/324560



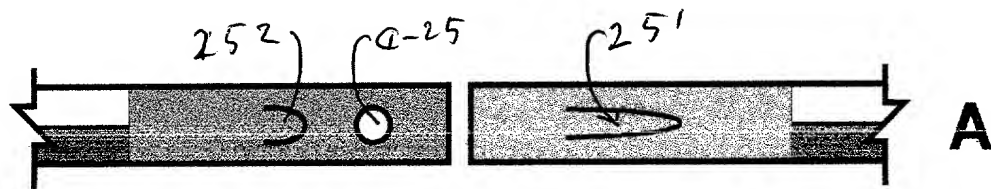


FIG. 25

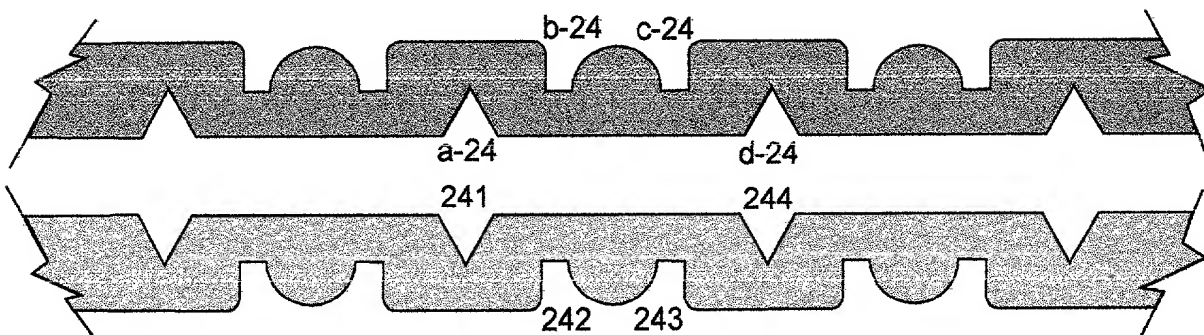

A

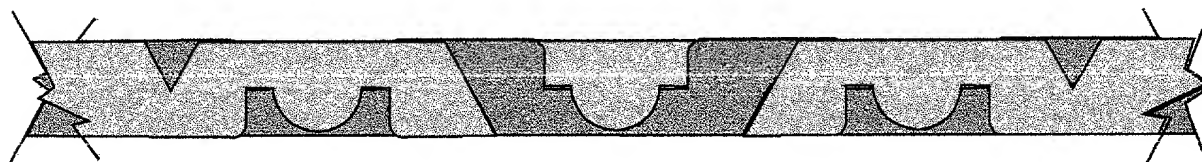

B

FIG. 26

007070" 12324560

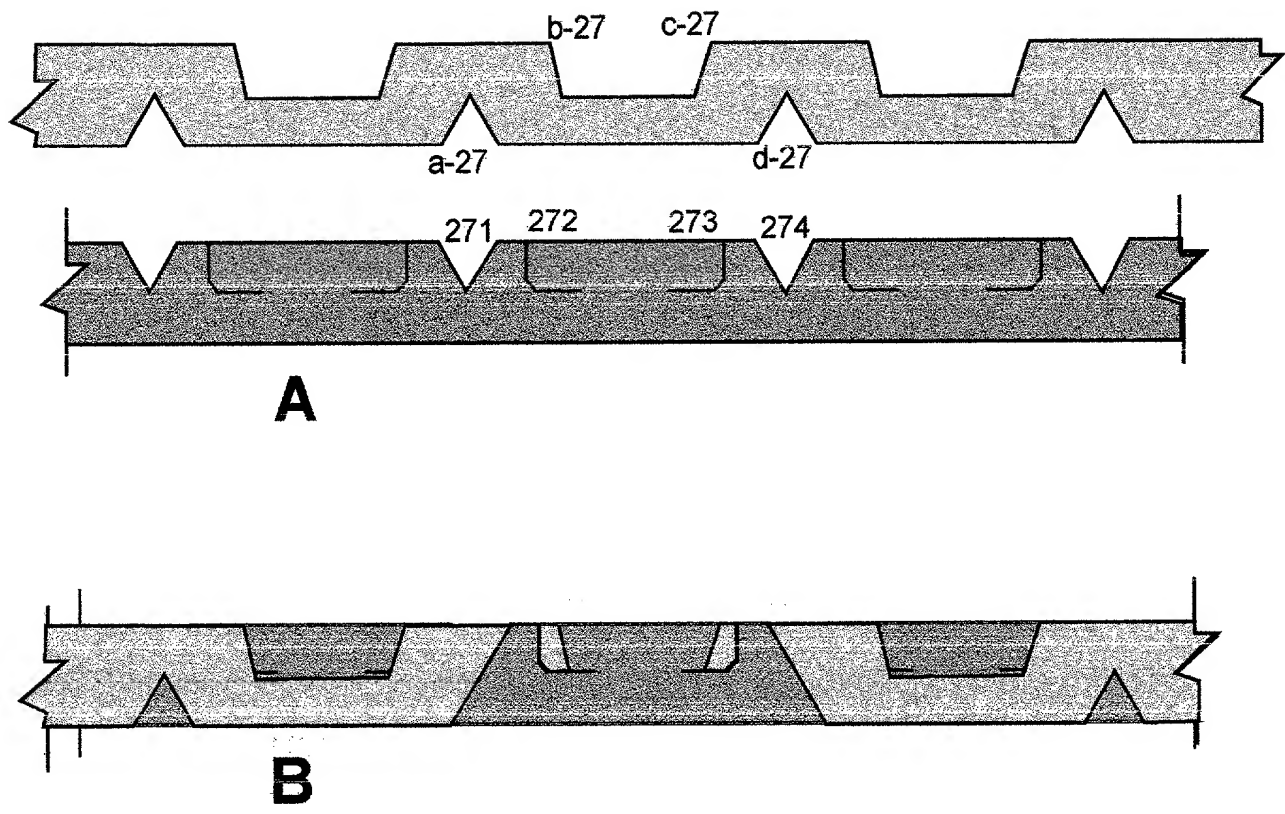


FIG. 27

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION FOR UTILITY OR
DESIGN
PATENT APPLICATION
(37 CFR 1.63)**

☒ Declaration
Submitted
with Initial
Filing
OR
☐ Declaration
Submitted after Initial
Filing (surcharge
(37 CFR 1.16 (e))
required)

Attorney Docket Number

First Named Inventor

GRAHAM M. ROUSE, JR.

COMPLETE IF KNOWN

Application Number

1

Filing Date

MARCH 31, 2000

Group Art Unit

Examiner Name

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

ADVANCED APERTURE FRAMEWORK BALLOON DISPLAY

the specification of which

(Title of the Invention)

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY)

as United States Application Number or PCT International

Application Number

and was amended on (MM/DD/YYYY)

(if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.
	03/31/1999	

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.